


MARINE STAINLESS 316 SERIES ML-4 | ML-5 | ML-6 | ML-7 Tested under ASTM B119-19


** Features High Output LEDs

Tested under ASTM B119-19 method
 3000K / 4000K / 5000K User Selectable
 R-B-W 3000K independent controls
 Stainless 316 High Polished Mirror finish
 Stainless Powder Coat finish, IP-65 rating
 DC 10-30V input, ML-4 (5W) 300 Lumens,
 ML-5 (5W) 300 Lumens, ML-6 (9W) 580 Lumens,
 ML-7 (12W) 790 Lumens


Available in Modern Trim or Traditional Trim




ML 4



ML 5



ML 6



ML 7

Modern Trim




White Trim



Polished Trim


Traditional Trim




- Color code DC wiring - including R-B-W 3 pairs DC 12V, DC 10-30V, DC 24V
- Stainless spring loaded mounting clips
- Stainless mounting screws
- User Selectable CCT Switch (3000K, 4000K, 5000K)
- Permanent Gasket
- 316 Stainless mounting trim

Electrical rating:


10-30V DC which will operate from 10V-16V & 22-28V
 12V DC will operate from 10-16 and dimmable
 24V DC will operate from 22-28V and dimmable

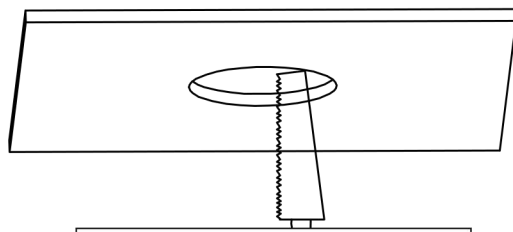


- ① New installation please refer to size above and cut opening according to size reference provided from chart.

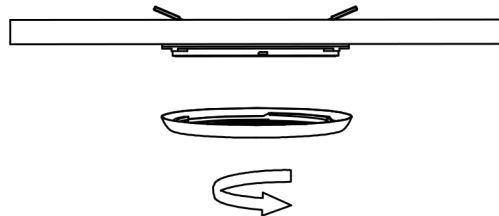

- ① Fixture trim should be fasten counter clockwise to secure.



- ① Fixture can be mounted with spring clips for interior install or use mounting screws to further secure.

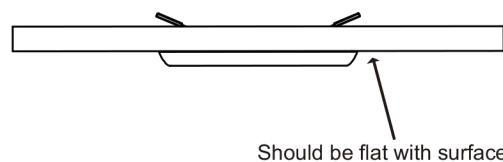

Should be flat with surface

- ① Fixture should ne mounted totally flat with surface to ensure water tightness.