



EUROPEAN
QUALITY

Slim LED Deck Lights 150W & 200W Special Designed for Marine Use C5M Coating for Corrosion Protection

Dual Power Input option




PHILIPS
LUMILEDS





Technical Specifications

Led Power	150W Flood Light Item code 30897	200W Flood Light Item code 30898
Body Material	Die cast pure aluminum with Marine anti-corrosion coating, stainless steel 316 mounting bracket and screws.	
Input Voltage(V)	85-300V AC 50/60Hz Meanwell driver	
Light Color (CCT)	3000/4200/5000/6500K	
Lumens Per Watt (Efficiency)	130 Lm/W	
Max.Light Output	19500 Lumens	26000 Lumens
Beam angle	120 degrees	
Color Accuracy (CRI)	>80 Ra	
Product Dimensions	360X370X60mm without bracket 460X370X60mm with bracket	380X370X70mm without bracket 480X370X70mm with bracket
IP Rating	IP 66	

Luminance Intensity Distribution 200W



Cone Lux Diagram 200W

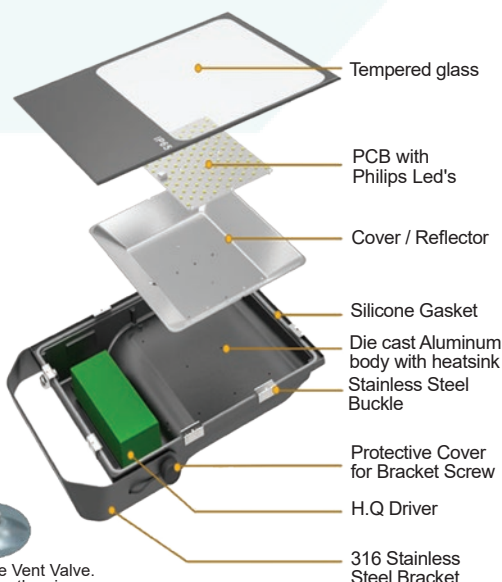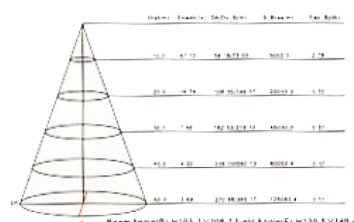

Pressure Vent Valve.
Equalizes the air pressure
inside and outside to prevent
moisture ingress inside the light.

