


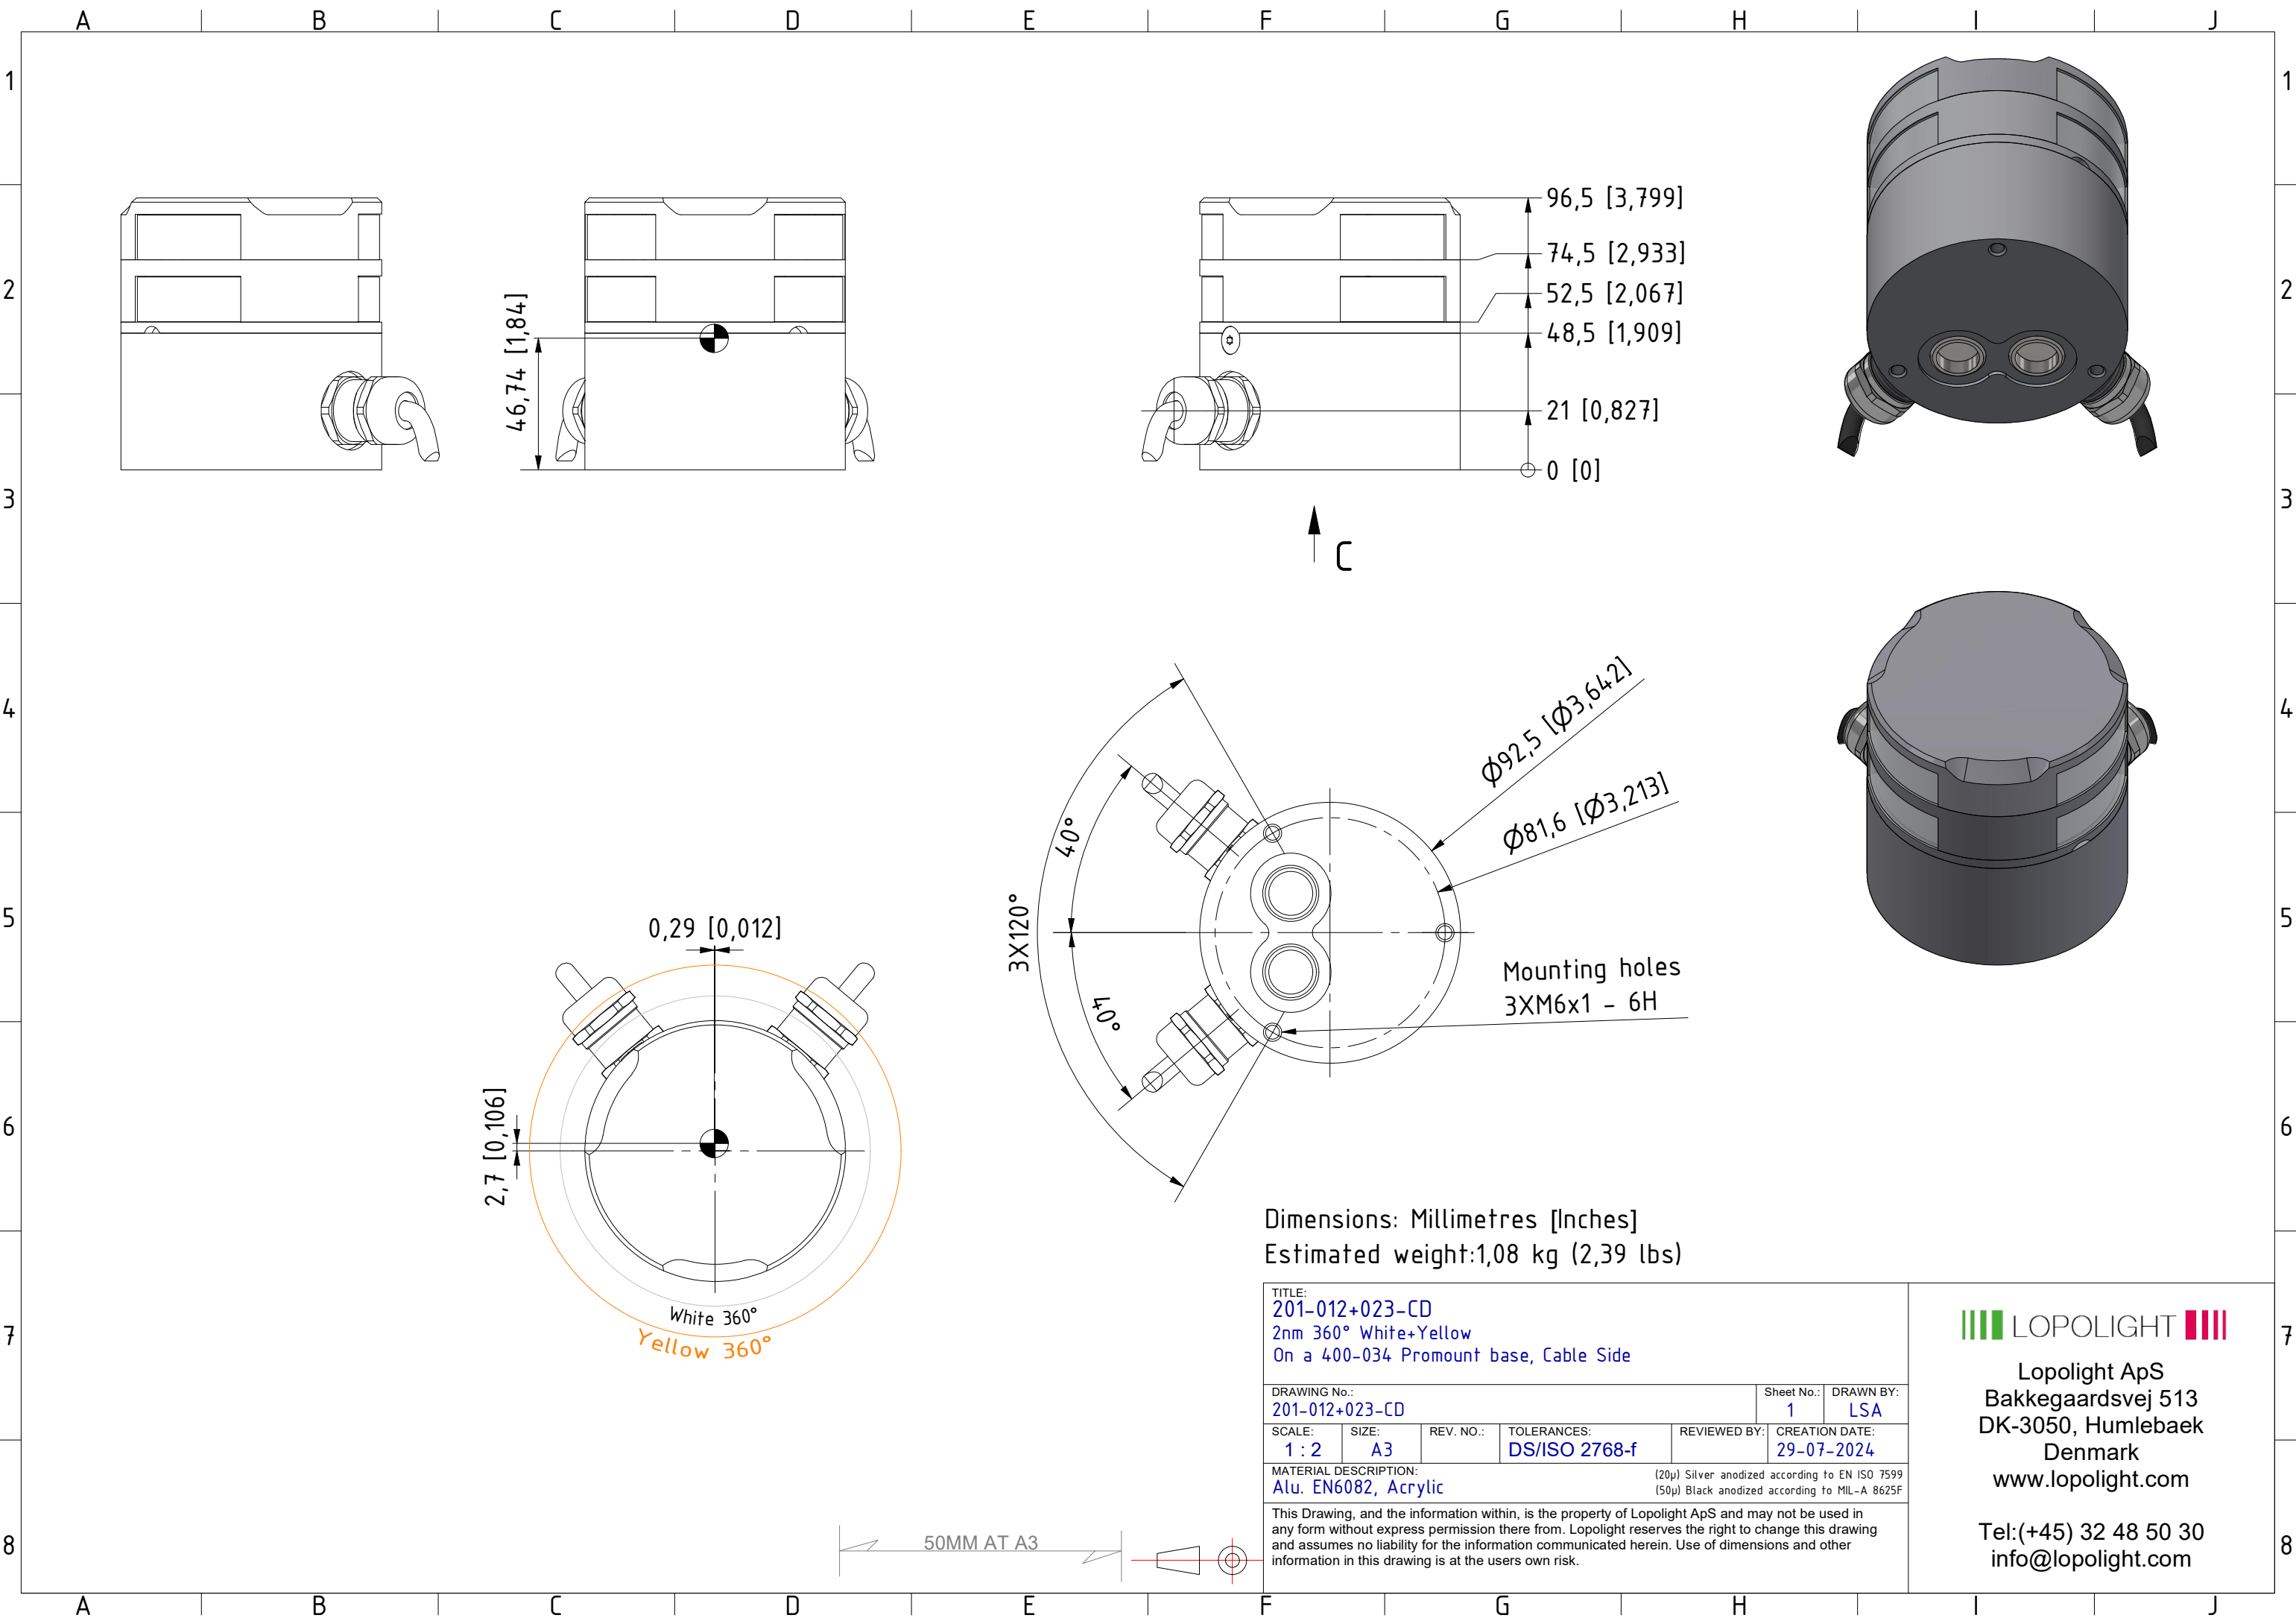


Dimensions: Millimetres [Inches]
Estimated weight:1,08 kg (2,39 lbs)


TITLE: 201-012+023-CD 2nm 360° White+Yellow On a 400-034 Promount base, Cable Side					
DRAWING No.: 201-012+023-CD				Sheet No.: 1	DRAWN BY: LSA
SCALE: 1 : 2	SIZE: A3	REV. NO.:	TOLERANCES: DS/ISO 2768-f	REVIEWED BY:	CREATION DATE: 29-07-2024
MATERIAL DESCRIPTION: Alu. EN6082, Acrylic					
(20µ) Silver anodized according to EN ISO 7599 (50µ) Black anodized according to MIL-A 8625F					
This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk.					

LOPOLIGHT

Lopolight ApS
Bakkegaardsvej 513
DK-3050, Humlebaek
Denmark
www.lopolight.com

Tel:(+45) 32 48 50 30
info@lopolight.com

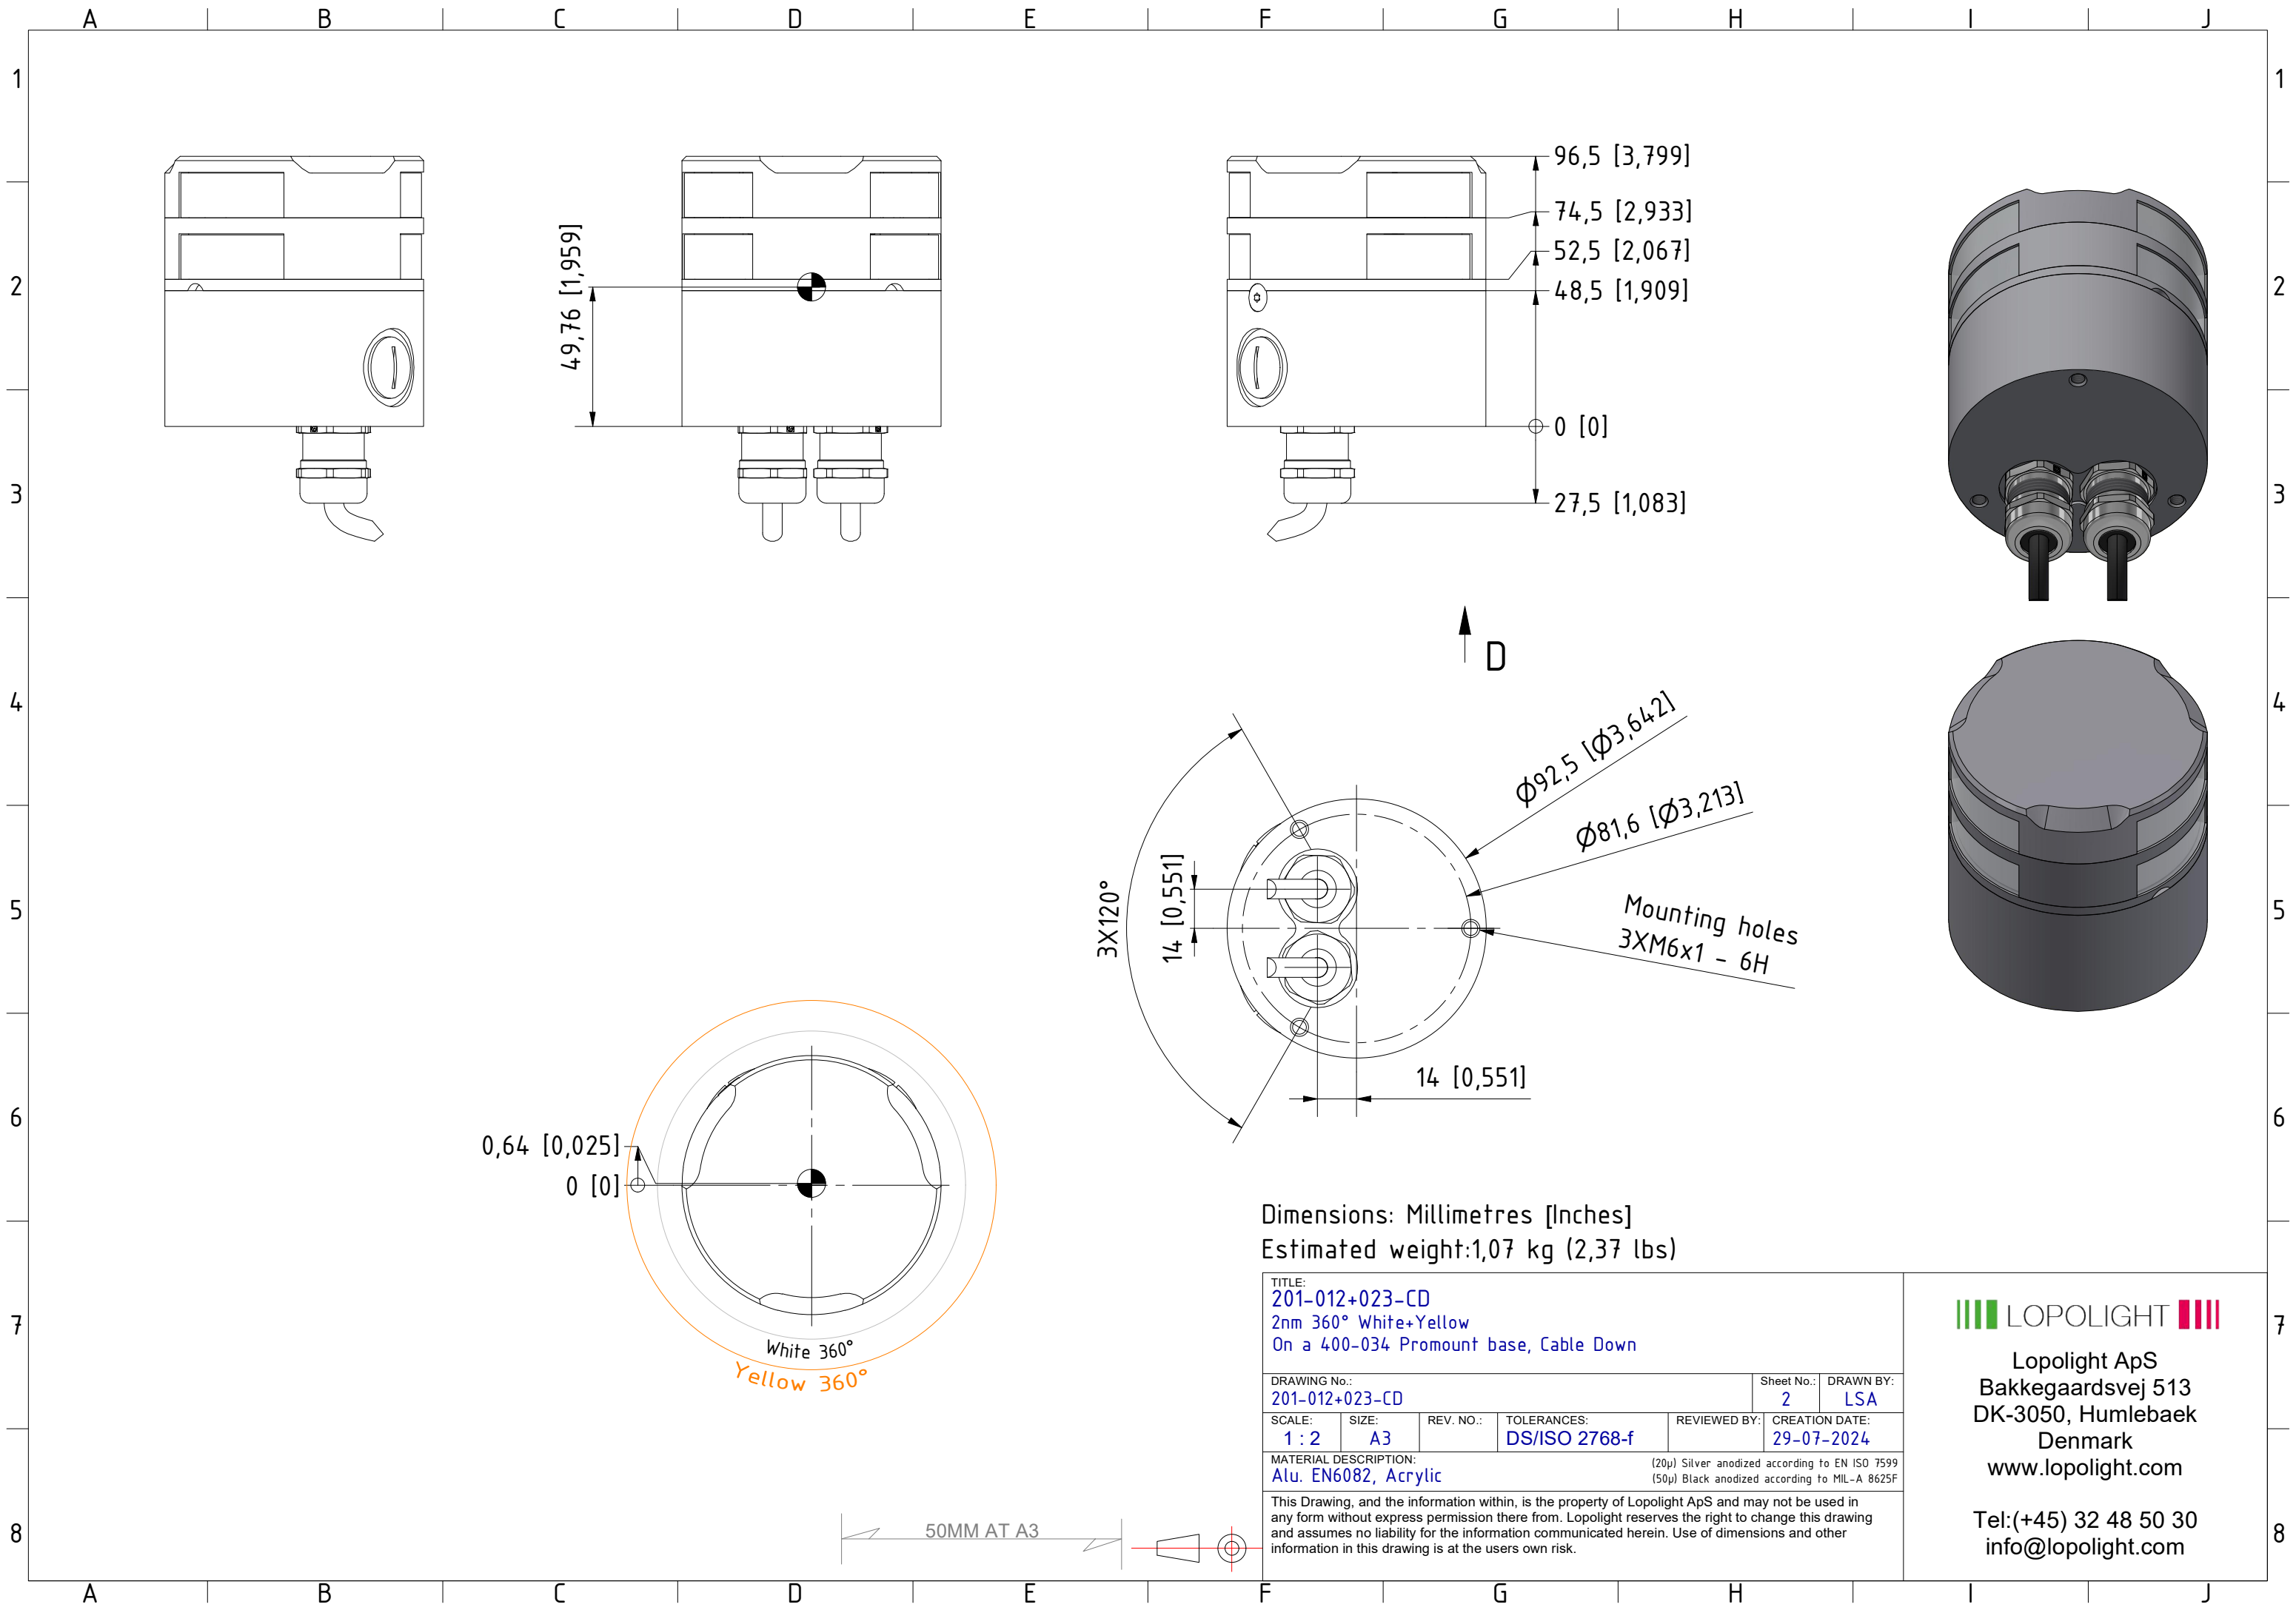

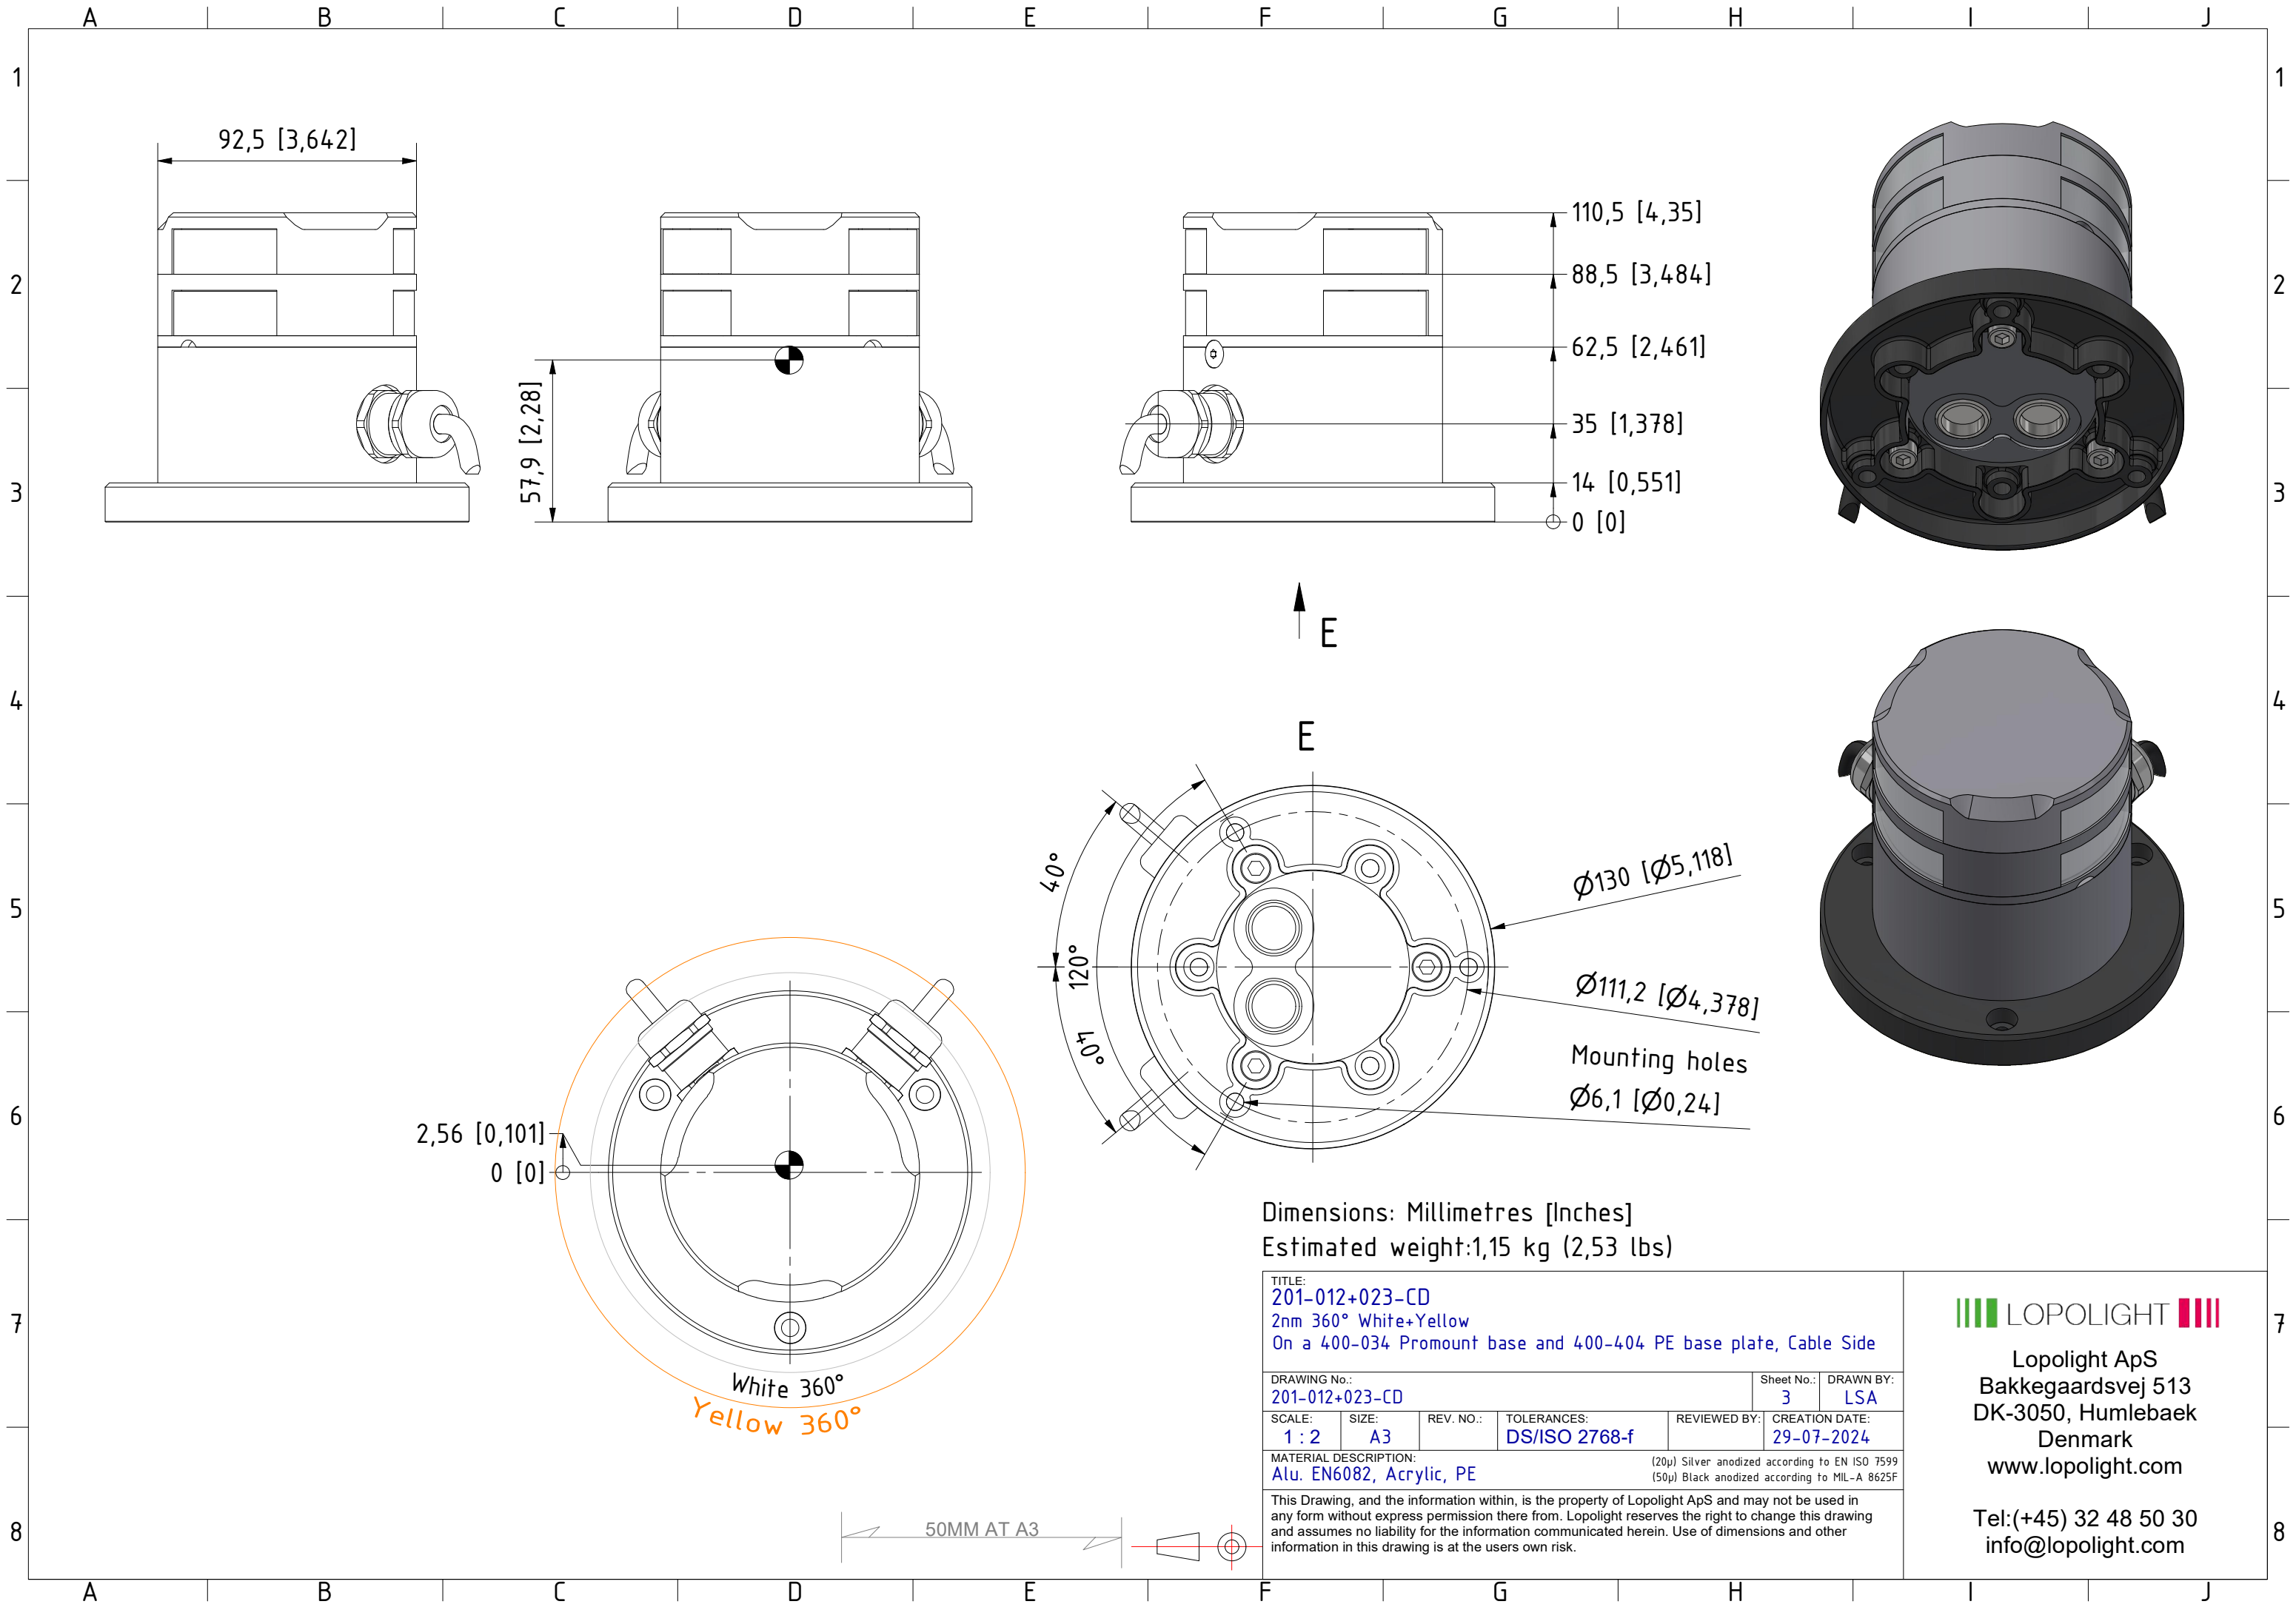







Dimensions: Millimetres [Inches]
Estimated weight:1,15 kg (2,53 lbs)

TITLE: 201-012+023-CD 2nm 360° White+Yellow On a 400-034 Promount base and 400-404 PE base plate, Cable Side					
DRAWING No.: 201-012+023-CD				Sheet No.: 3	DRAWN BY: LSA
SCALE: 1 : 2	SIZE: A3	REV. NO.:	TOLERANCES: DS/ISO 2768-f	REVIEWED BY:	CREATION DATE: 29-07-2024
MATERIAL DESCRIPTION: Alu. EN6082, Acrylic, PE					



Lopolight ApS
Bakkegaardsvej 513
DK-3050, Humlebaek
Denmark
www.lopolight.com

Tel:(+45) 32 48 50 30
info@lopolight.com

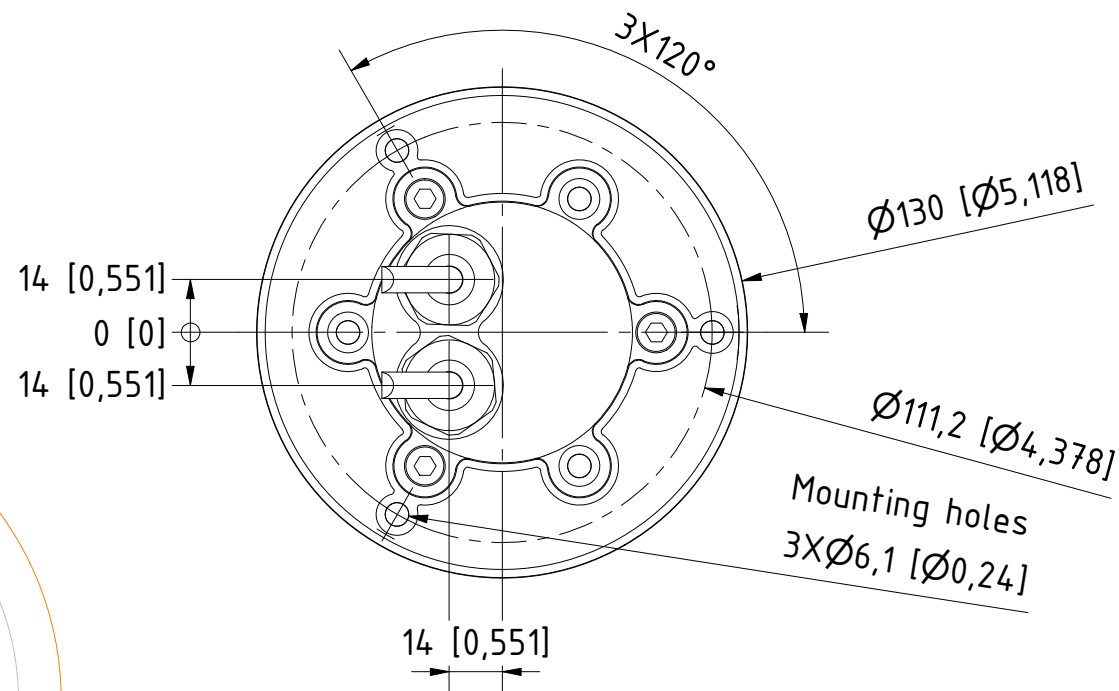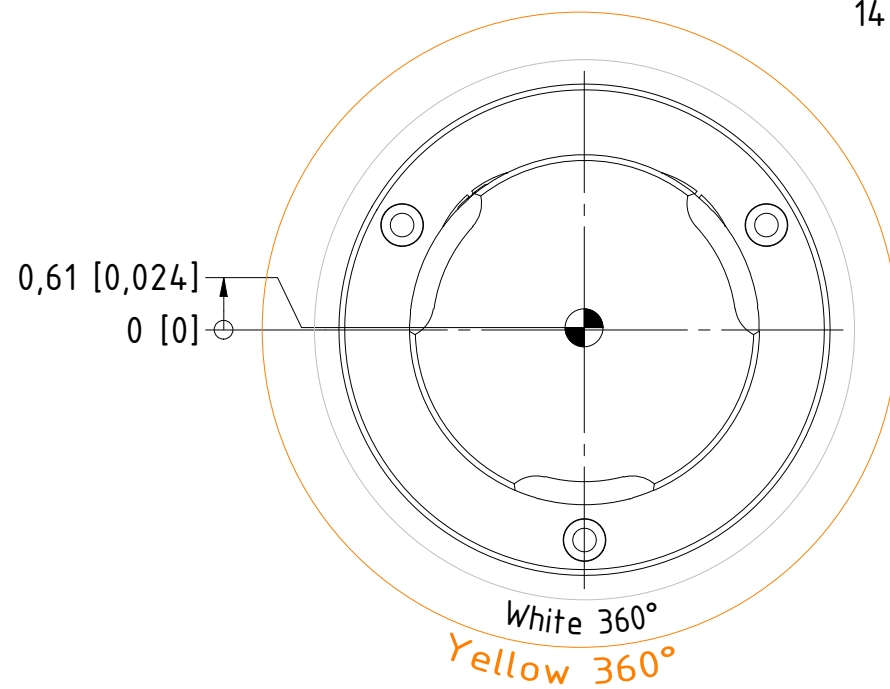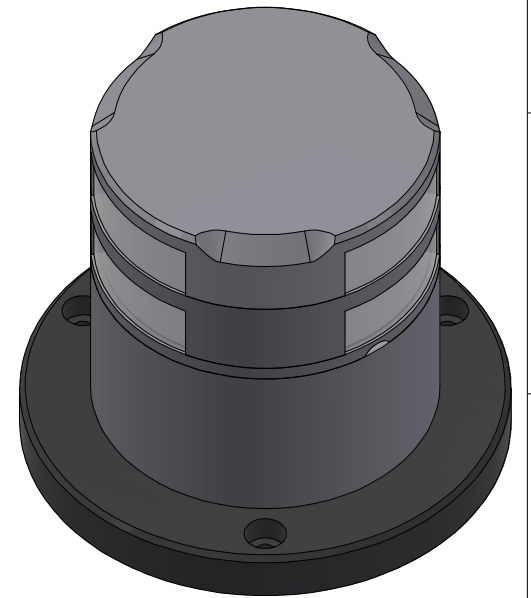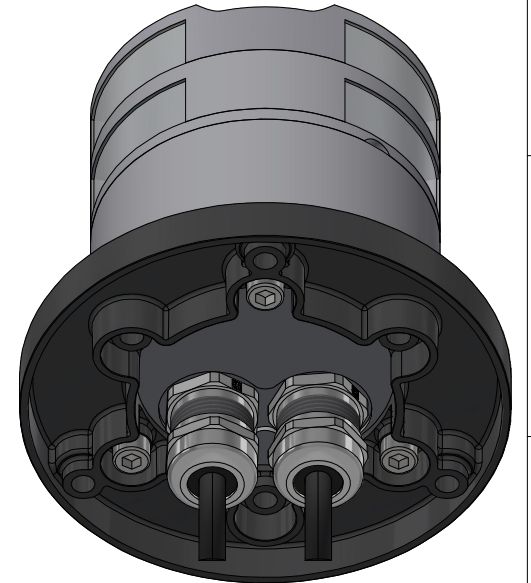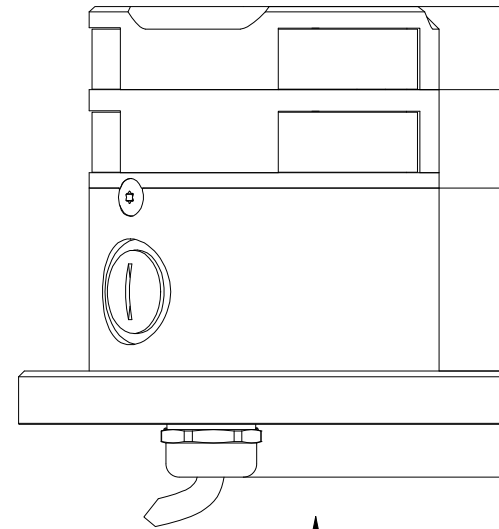

Dimensions: Millimetres [Inches]
Estimated weight: 1,14 kg (2,51 lbs)

TITLE:
201-012+023-CD
2nm 360° White+Yellow
On a 400-034 Promount base and 400-404 PE base plate, Cable Down


DRAWING No.: 201-012+023-CD				Sheet No.: 4	DRAWN BY: LSA
SCALE: 1 : 2	SIZE: A3	REV. NO.:	TOLERANCES: DS/ISO 2768-f	REVIEWED BY:	CREATION DATE: 29-07-2024
MATERIAL DESCRIPTION: Alu. EN6082, Acrylic, PE				(20p) Silver anodized according to EN ISO 7599 (50p) Black anodized according to MIL-A 8625F	


This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk.





Lopolight ApS
Bakkegaardsvej 513
DK-3050, Humlebaek
Denmark
www.lopolight.com

Tel:(+45) 32 48 50 30
info@lopolight.com



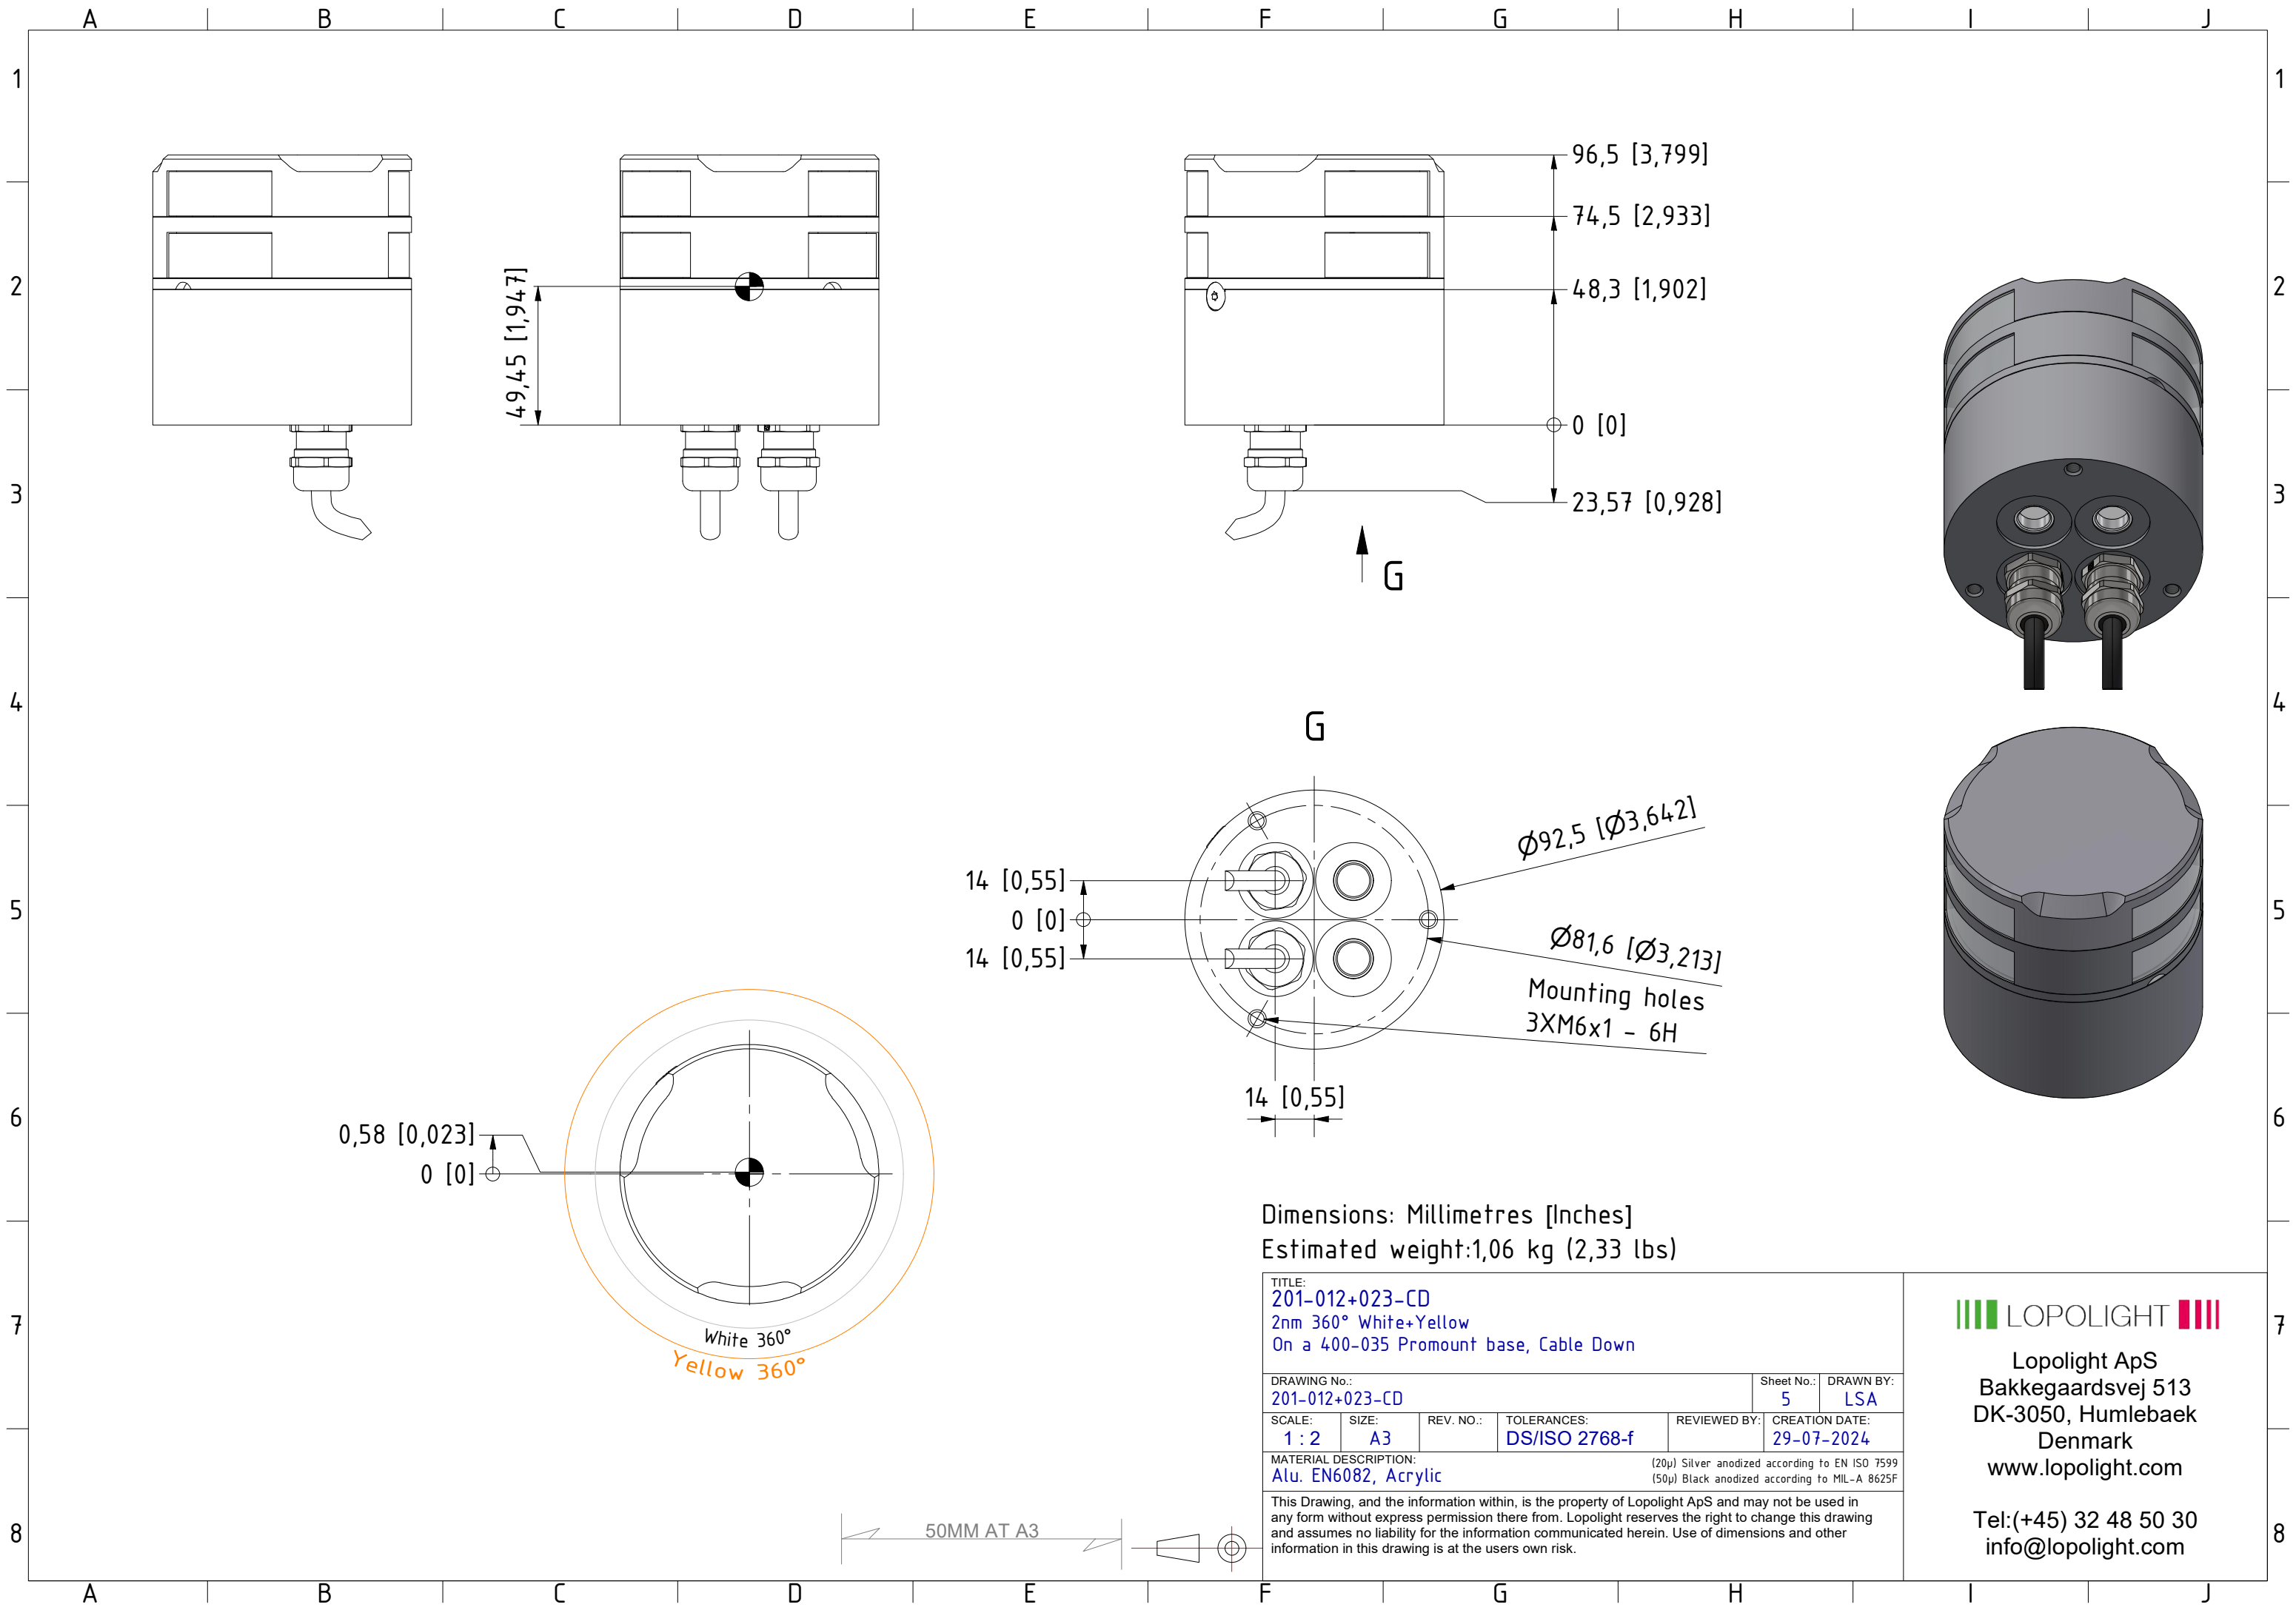

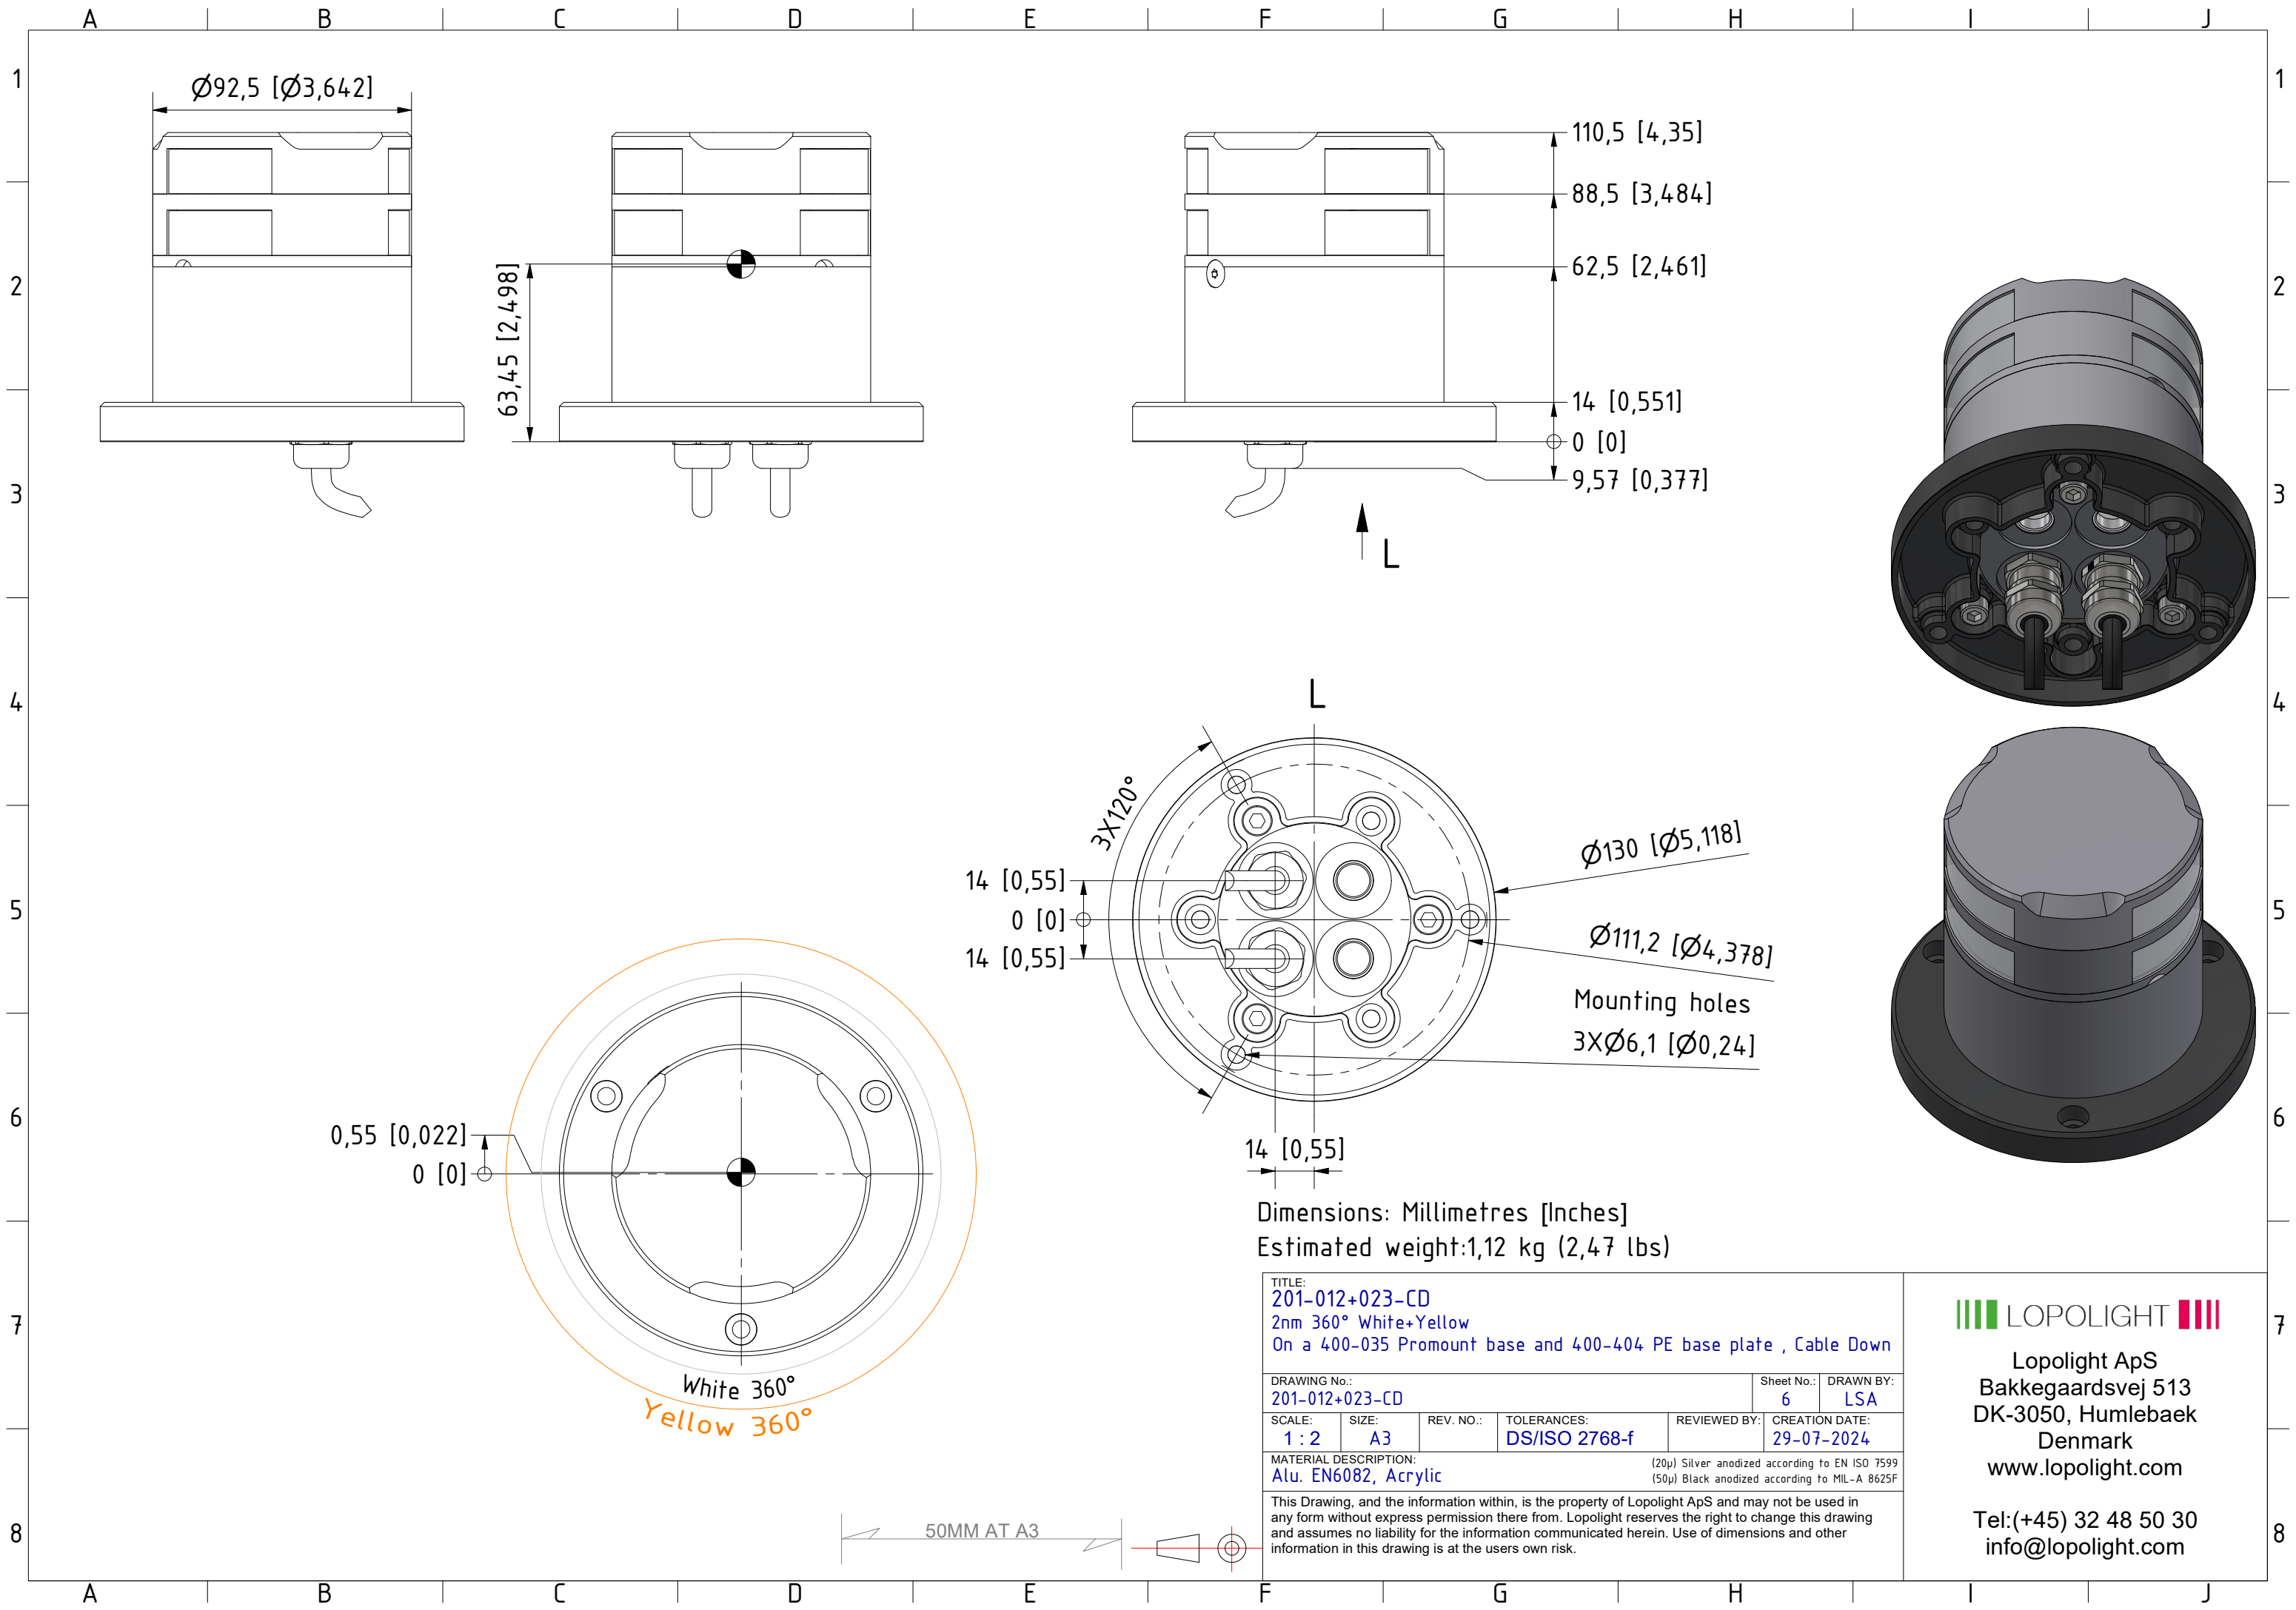

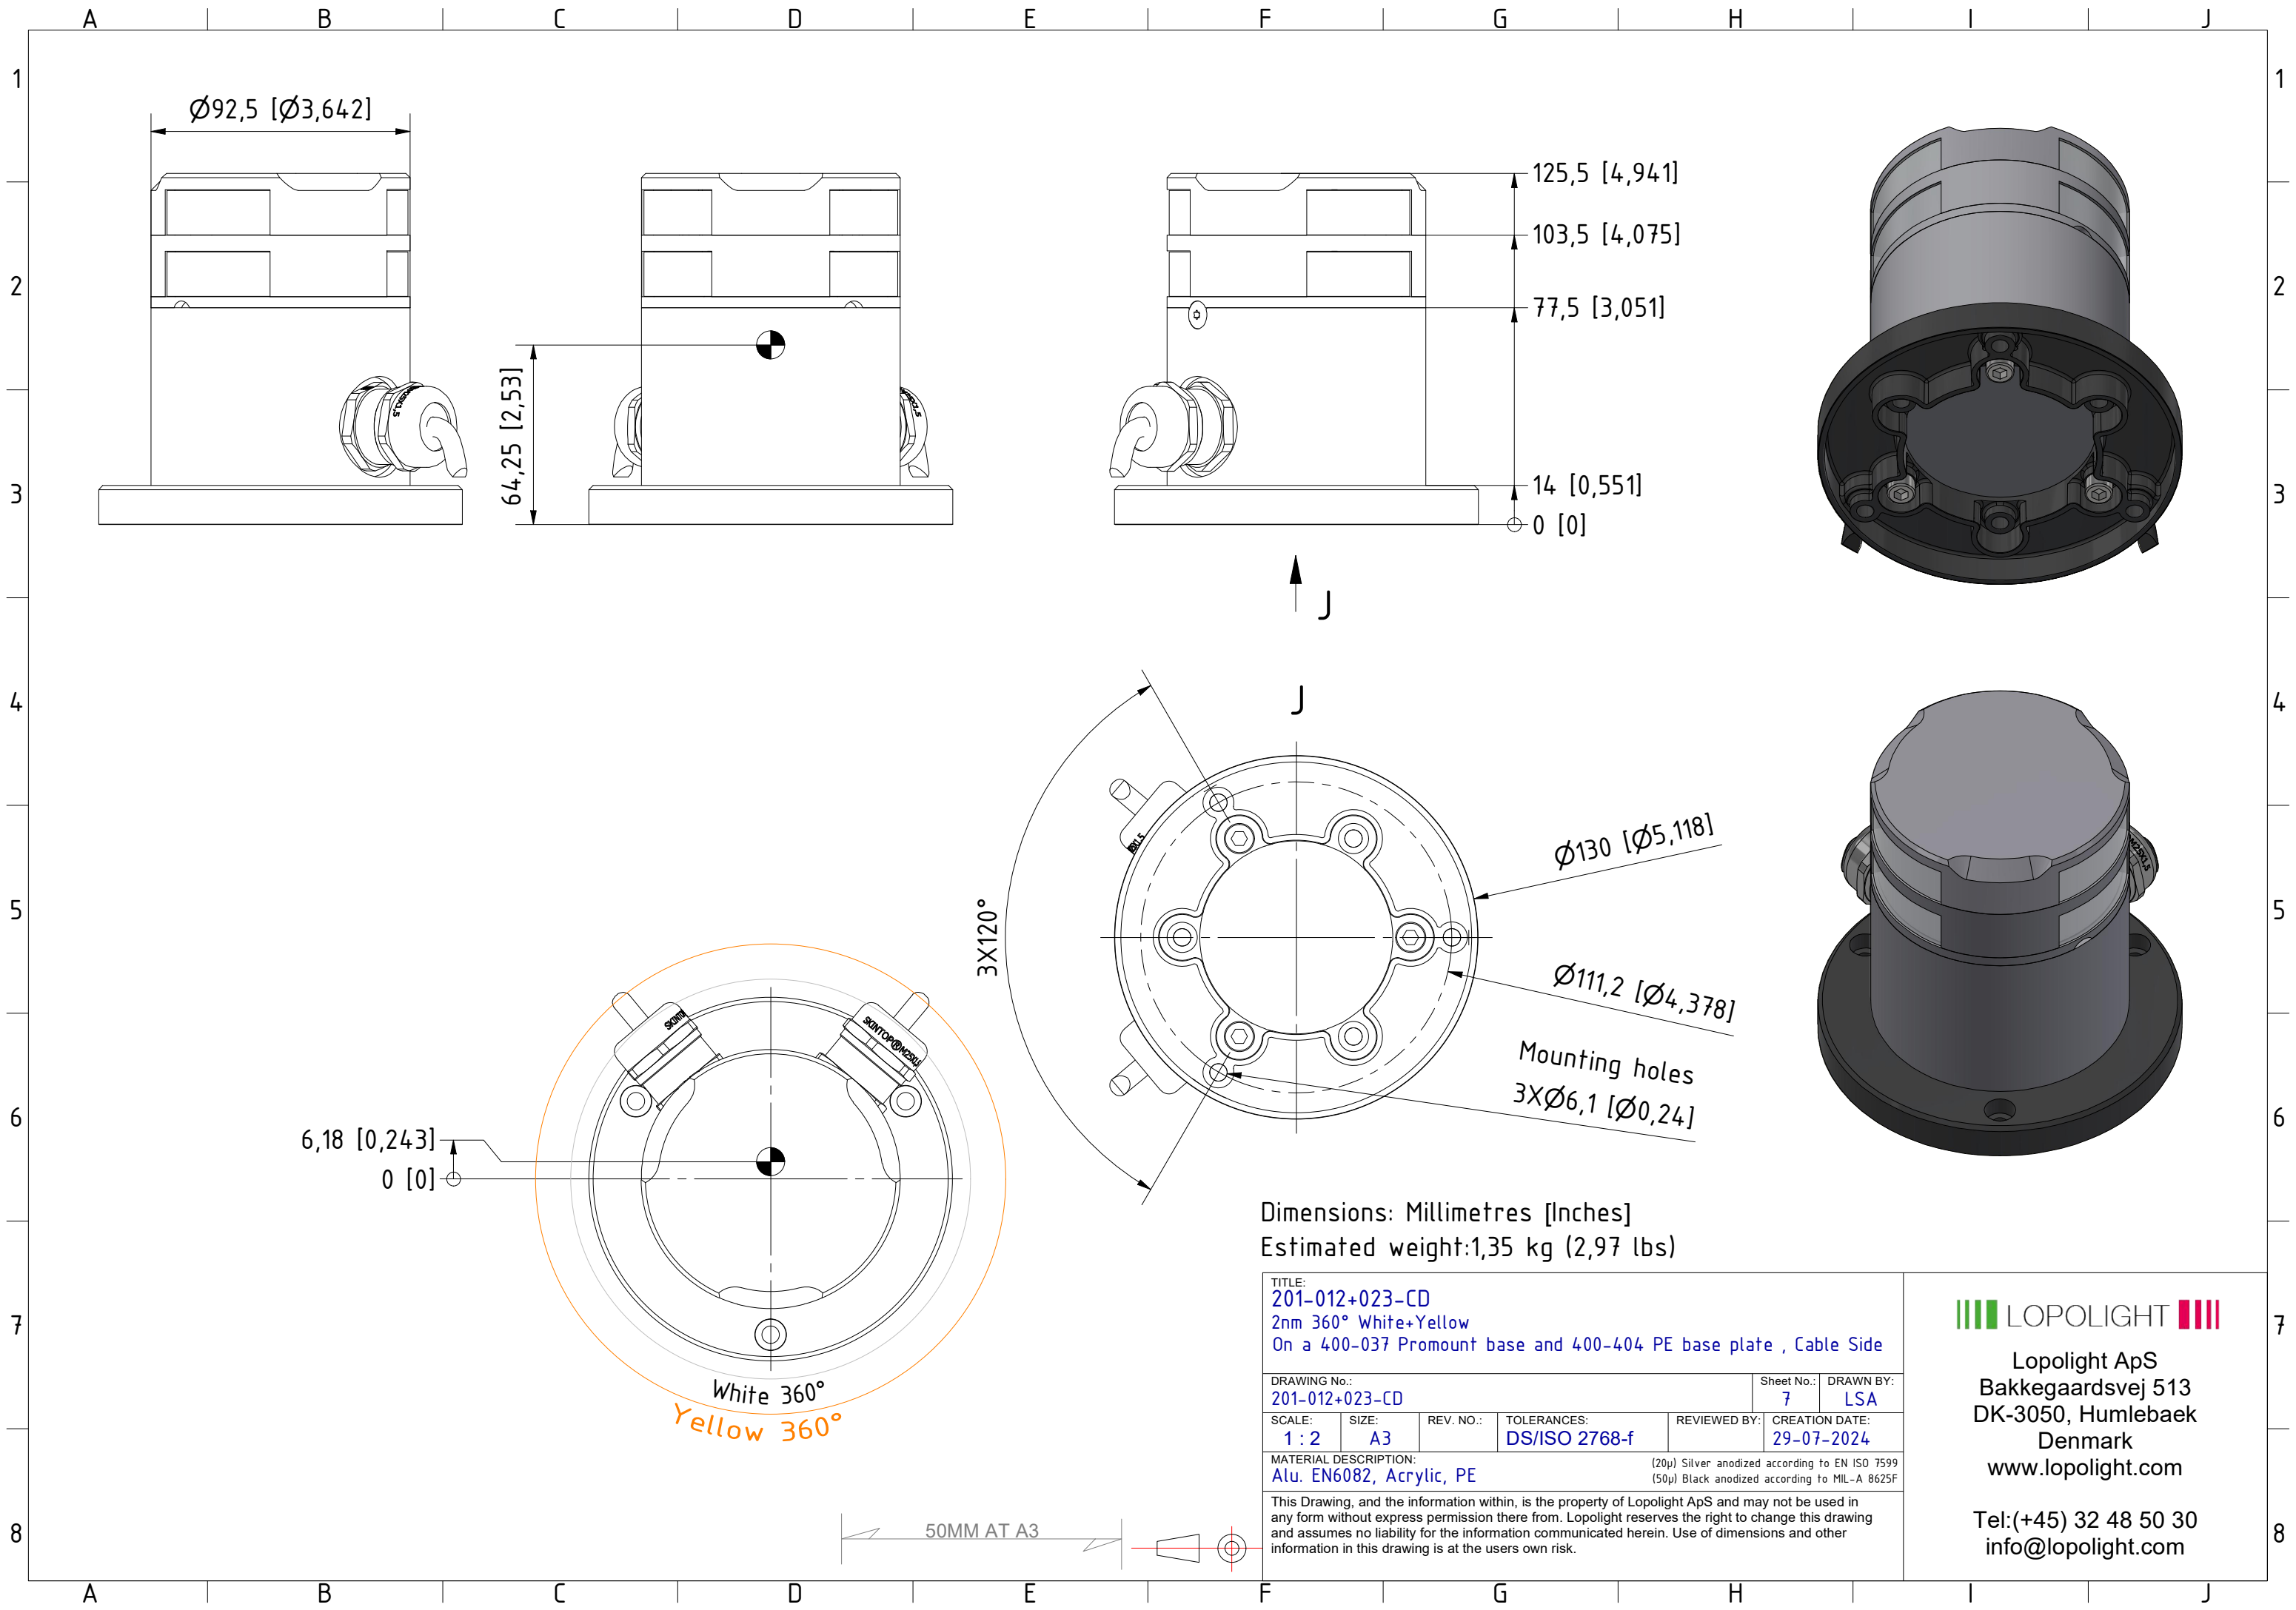

TITLE: 201-012+023-CD 2nm 360° White+Yellow On a 400-037 Promount base and 400-404 PE base plate , Cable Side					
DRAWING No.: 201-012+023-CD			Sheet No.: 7		DRAWN BY: LSA
SCALE: 1:2	SIZE: A3	REV. NO.:	TOLERANCES: DS/ISO 2768-f	REVIEWED BY:	CREATION DATE: 29-07-2024
MATERIAL DESCRIPTION: Alu. EN6082, Acrylic, PE					
(20µ) Silver anodized according to EN ISO 7599 (50µ) Black anodized according to MIL-A 8625F					
This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk.					

LOPOLIGHT

Lopolight ApS
Bakkegaardsvej 513
DK-3050, Humlebaek
Denmark
www.lopolight.com

Tel:(+45) 32 48 50 30
info@lopolight.com