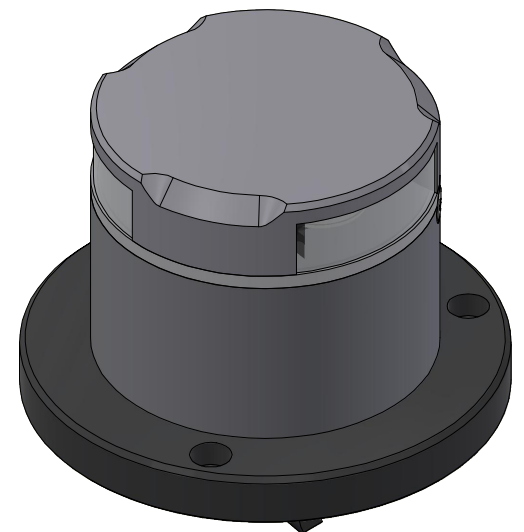
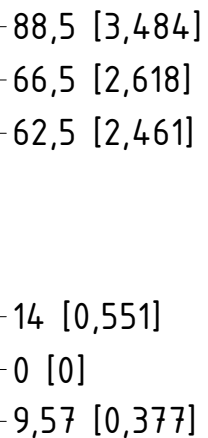


$$\frac{\emptyset 111,2}{\emptyset 4,378}$$

Mounting holes
3XØ6,1 [Ø0,24]

TITLE:
201-022
2nm 360° Blue fuelling
On a 400-035 Promount base and 400-404 PE base plate , Cable Down

DRAWING No.: 201-022				Sheet No.: 1	DRAWN BY: LSA
SCALE: 1 : 2	SIZE: A3	REV. NO.:	TOLERANCES: DS/ISO 2768-f	REVIEWED BY:	CREATION DATE: 29-07-2024

MATERIAL DESCRIPTION:	(20µ) Silver anodized according to EN ISO 7599
Alu. EN6082, Acrylic, PE	(50µ) Black anodized according to MIL-A 8625F


This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk.










Lopolight ApS
Bakkegaardsvej 513
DK-3050, Humlebaek
Denmark
www.lopolight.com

Tel:(+45) 32 48 50 30
info@lopolight.com



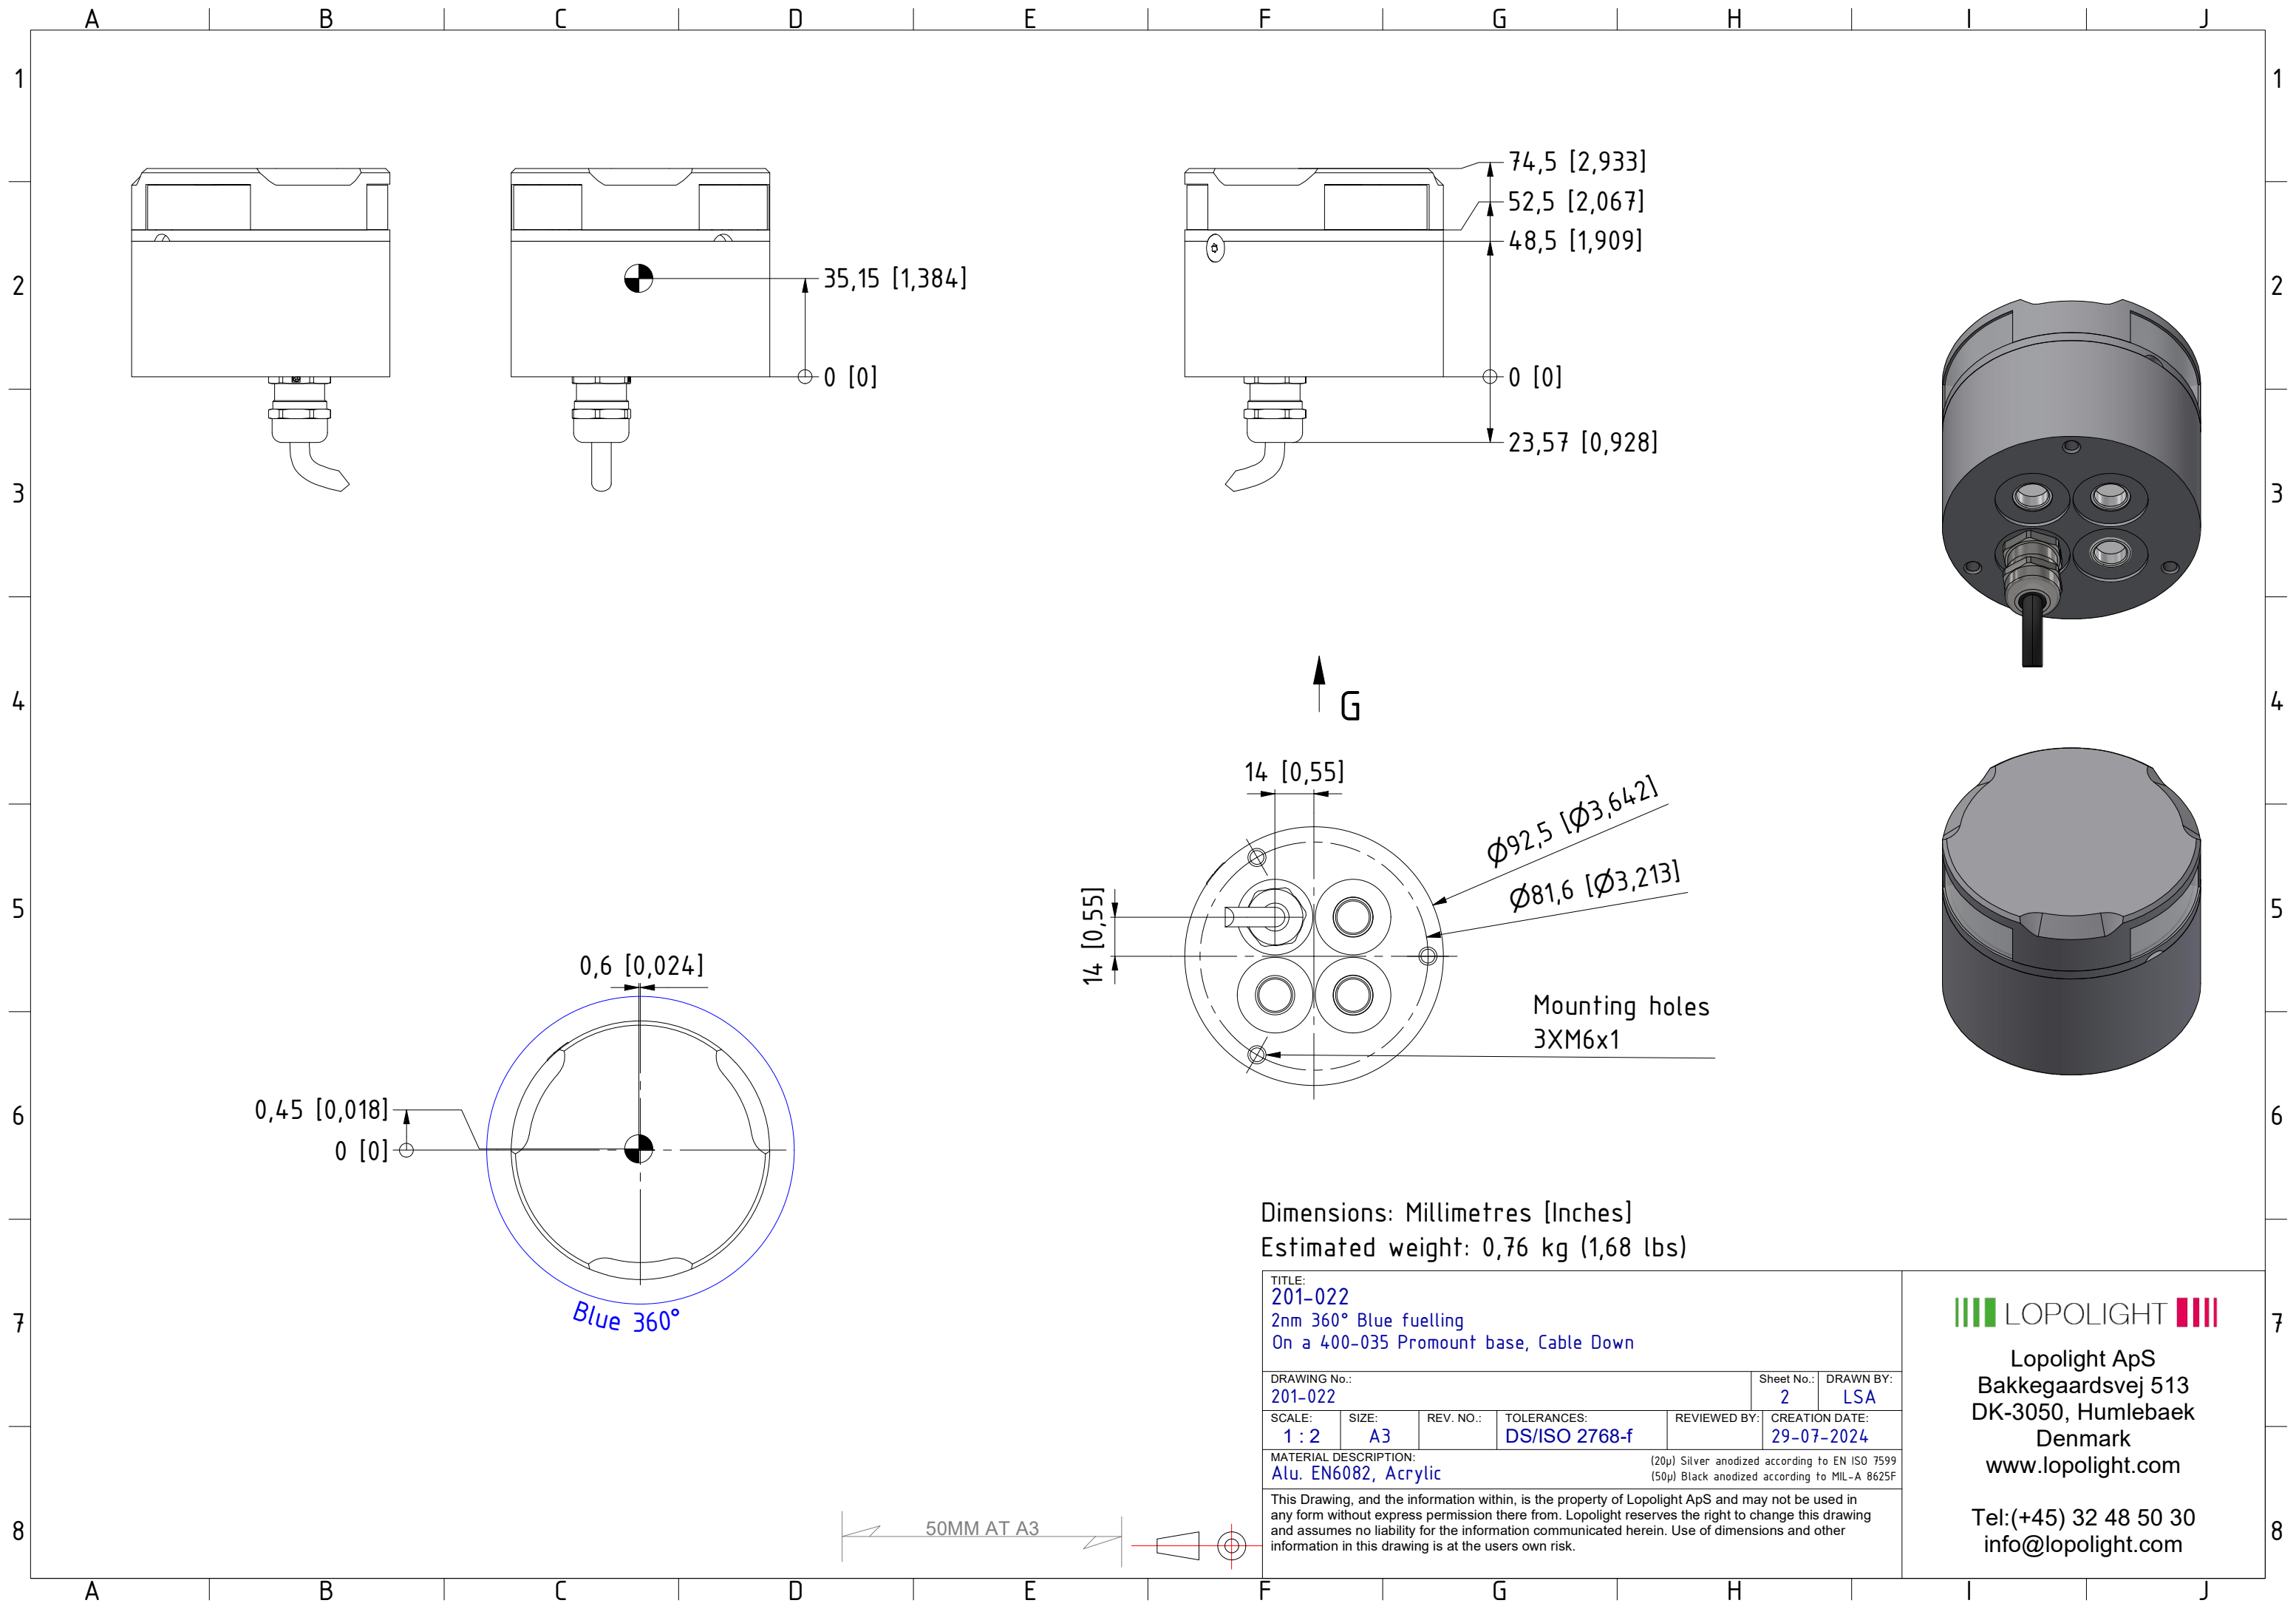

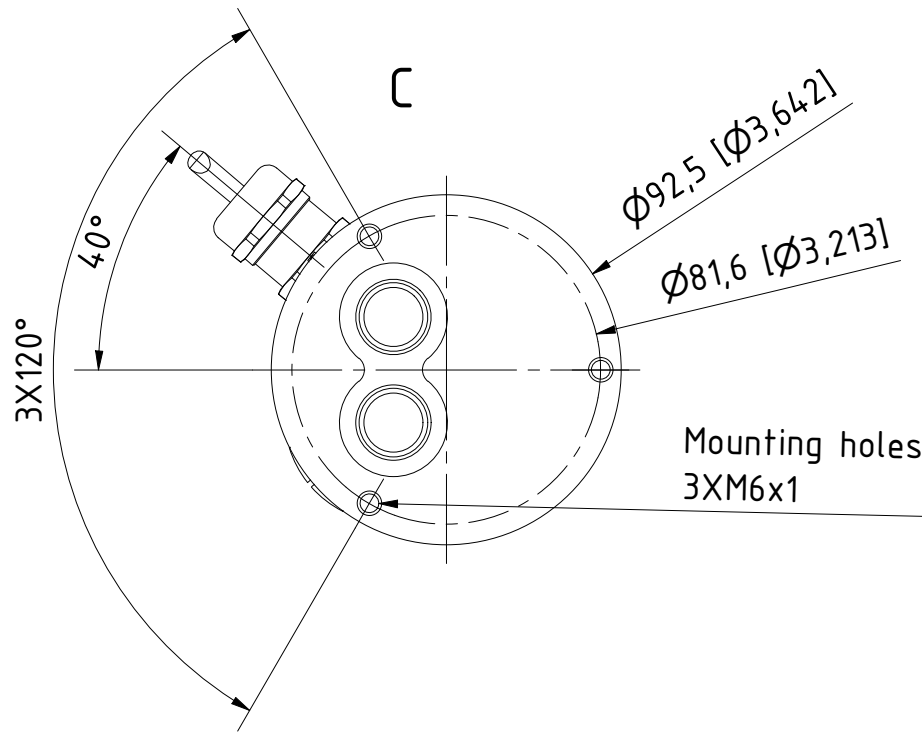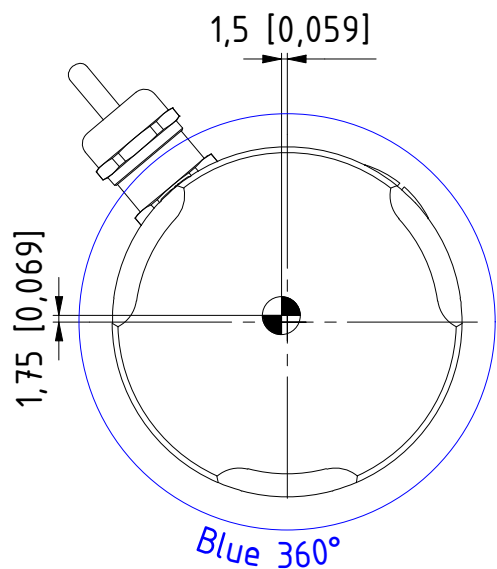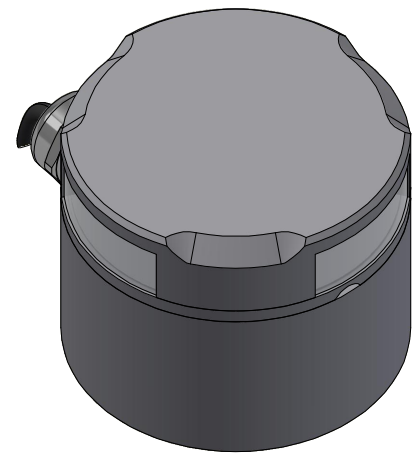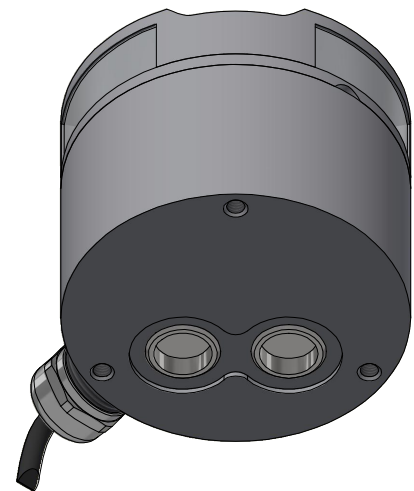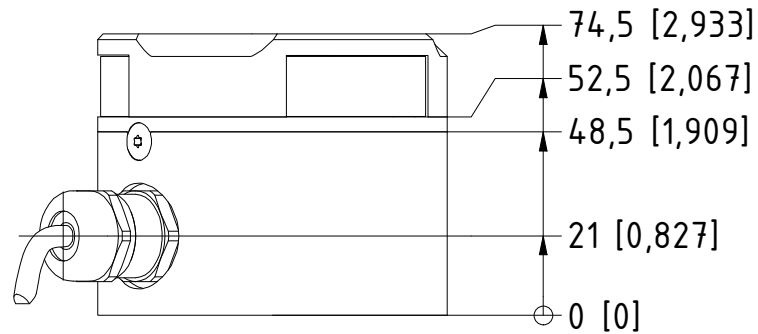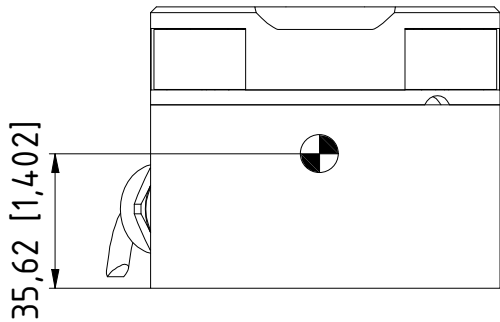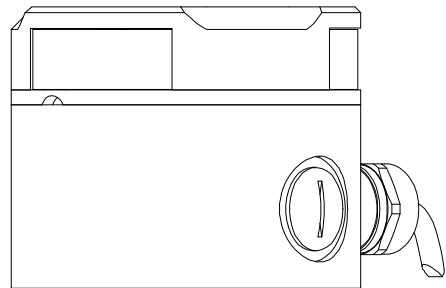

Dimensions: Millimetres [Inches]
Estimated weight: 0,78 kg (1,72 lbs)


TITLE: 201-022 2nm 360° Blue fuelling On a 400-034 Promount base, Cable Side					
DRAWING No.: 201-022				Sheet No.: 3	DRAWN BY: LSA
SCALE: 1 : 2	SIZE: A3	REV. NO.:	TOLERANCES: DS/ISO 2768-f	REVIEWED BY:	CREATION DATE: 29-07-2024
MATERIAL DESCRIPTION: Alu. EN6082, Acrylic					
(20µ) Silver anodized according to EN ISO 7599 (50µ) Black anodized according to MIL-A 8625F					
This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk.					



Lopolight ApS
Bakkegaardsvej 513
DK-3050, Humlebaek
Denmark
www.lopolight.com

Tel:(+45) 32 48 50 30
info@lopolight.com



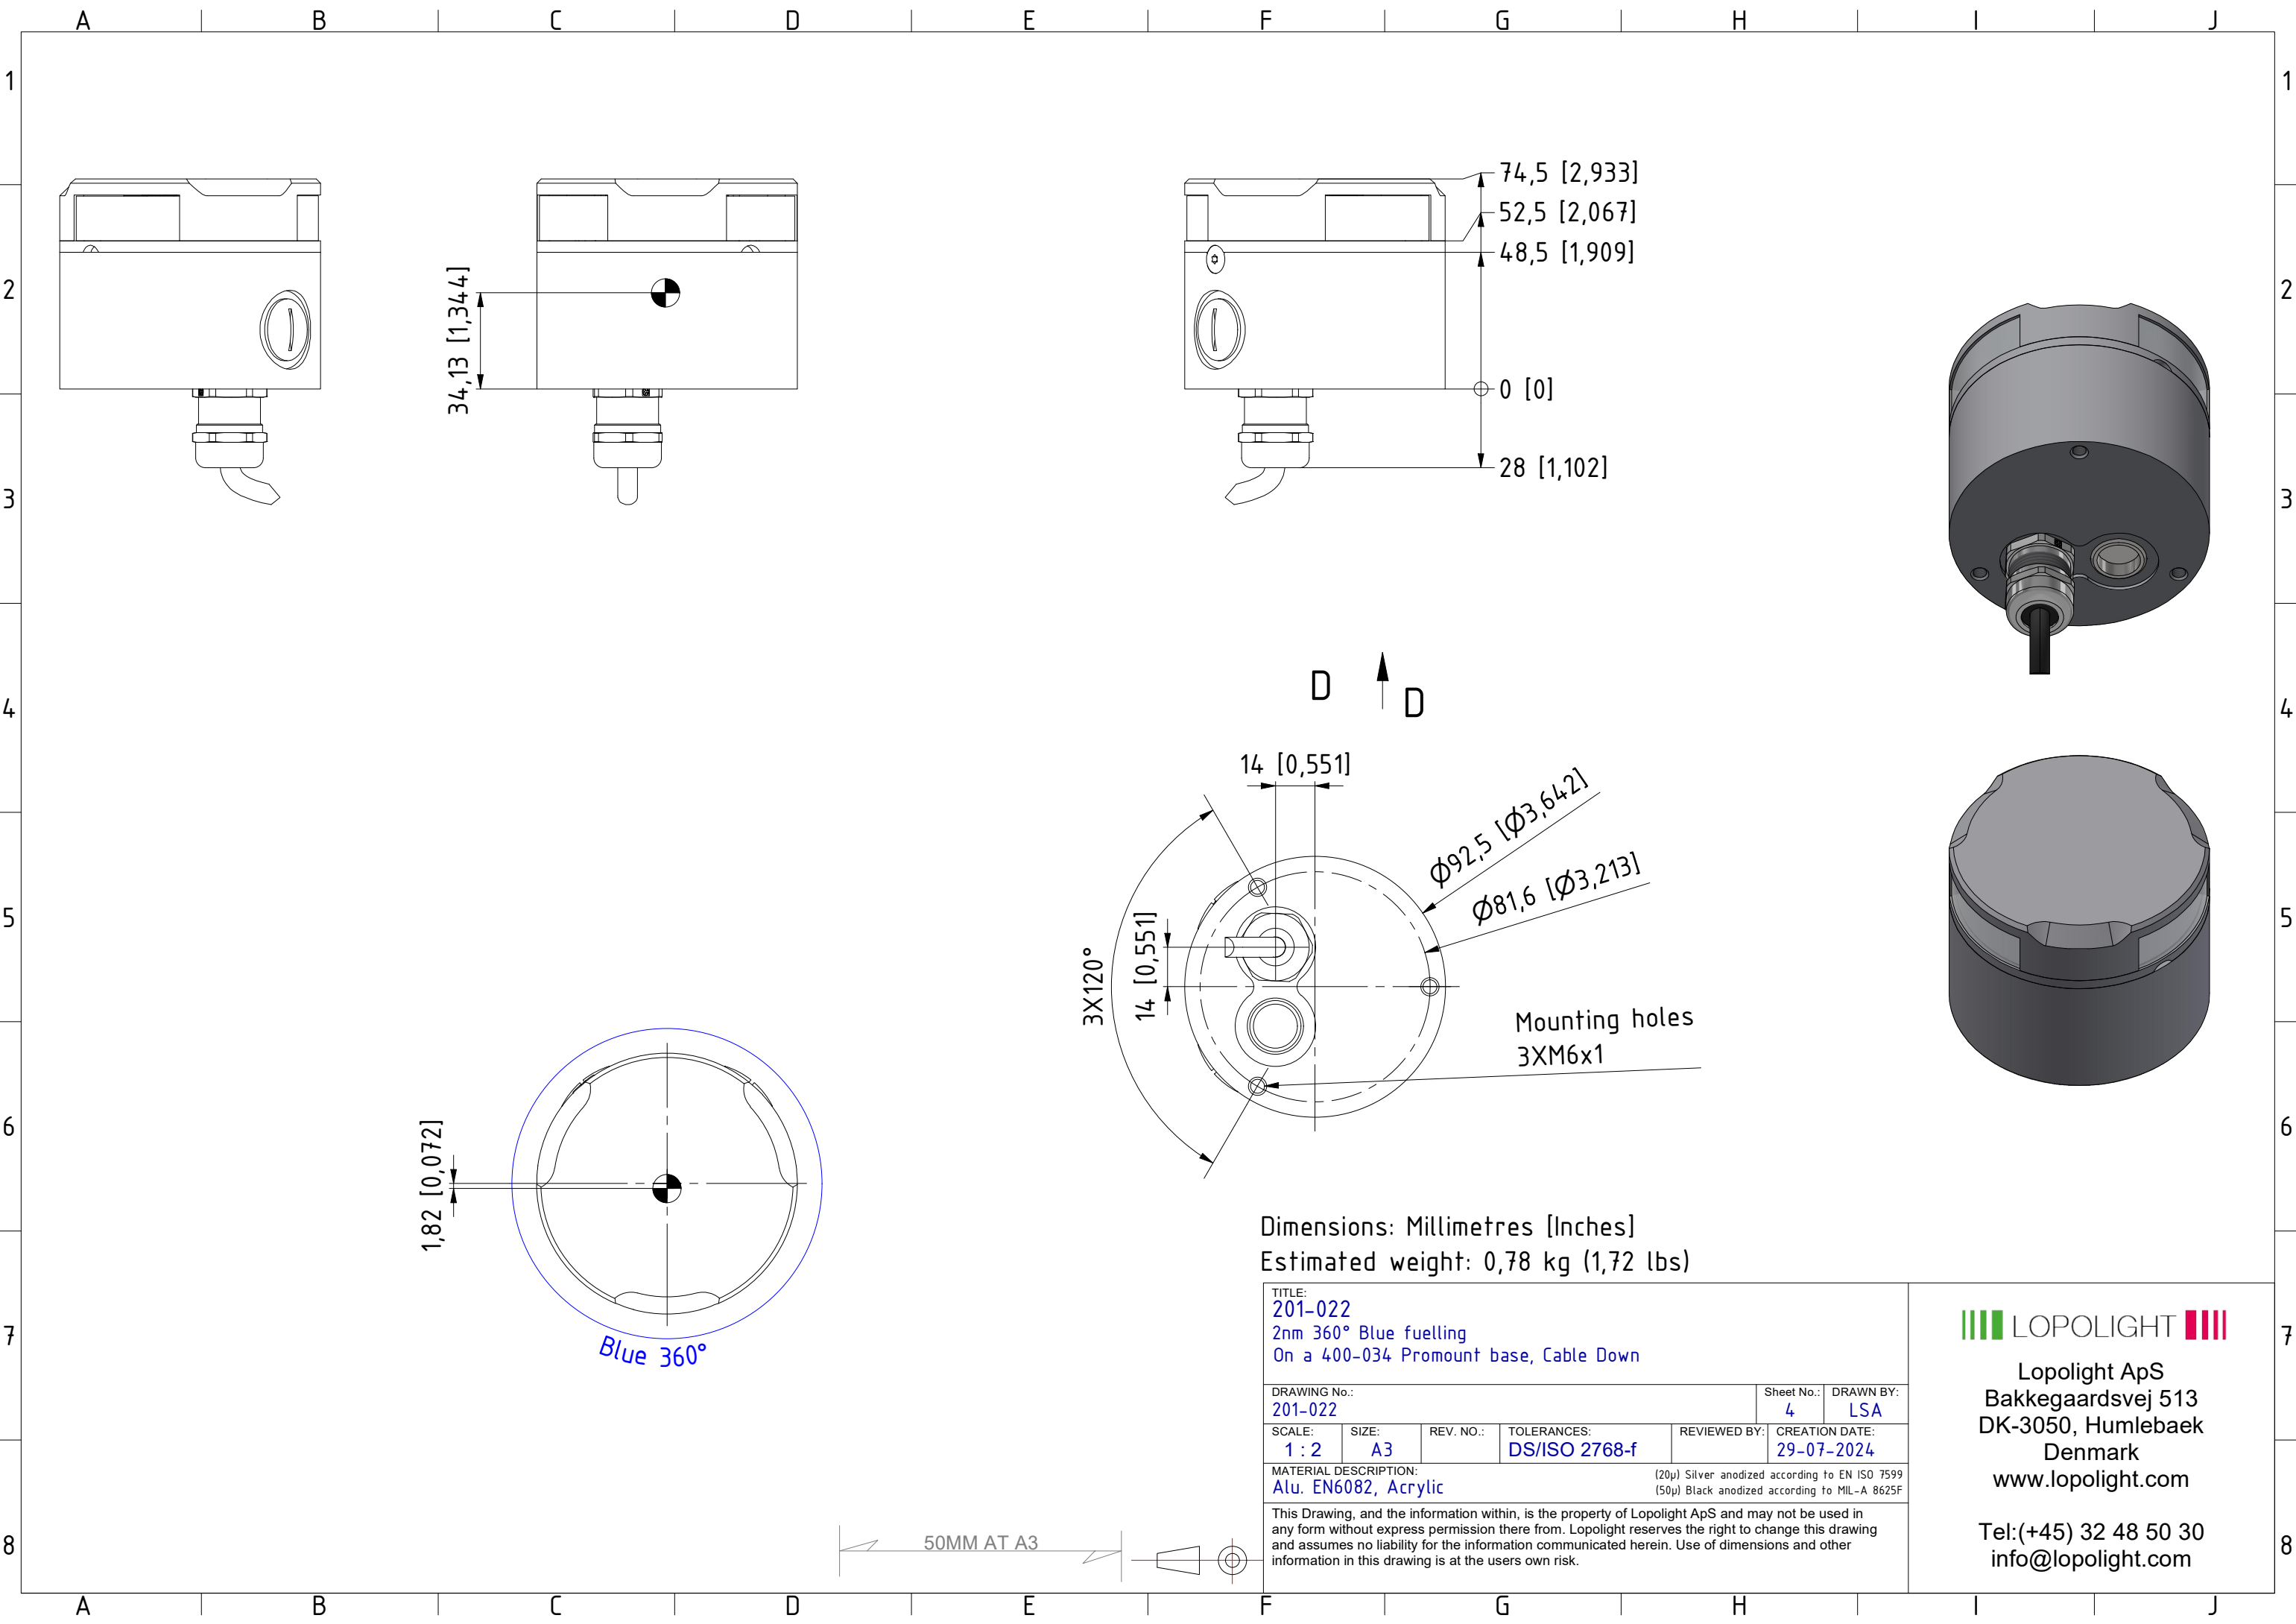

34,13 [1,344]

74,5 [2,933]
52,5 [2,067]
48,5 [1,909]
0 [0]
28 [1,102]

1,82 [0,072]

Blue 360°

D ↑ D


14 [0,551]
14 [0,551]
3X120°
Ø92,5 [Ø3,642]
Ø81,6 [Ø3,213]
Mounting holes
3XM6x1

Dimensions: Millimetres [Inches]
Estimated weight: 0,78 kg (1,72 lbs)

TITLE: 201-022 2nm 360° Blue fuelling On a 400-034 Promount base, Cable Down					
DRAWING No.: 201-022				Sheet No.: 4	DRAWN BY: LSA
SCALE: 1 : 2	SIZE: A3	REV. NO.:	TOLERANCES: DS/ISO 2768-f	REVIEWED BY:	CREATION DATE: 29-07-2024
MATERIAL DESCRIPTION: Alu. EN6082, Acrylic (20µ) Silver anodized according to EN ISO 7599 (50µ) Black anodized according to MIL-A 8625F					

This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk.

LOPOLIGHT
Lopolight ApS
Bakkegaardsvej 513
DK-3050, Humlebaek
Denmark
www.lopolight.com
Tel:(+45) 32 48 50 30
info@lopolight.com

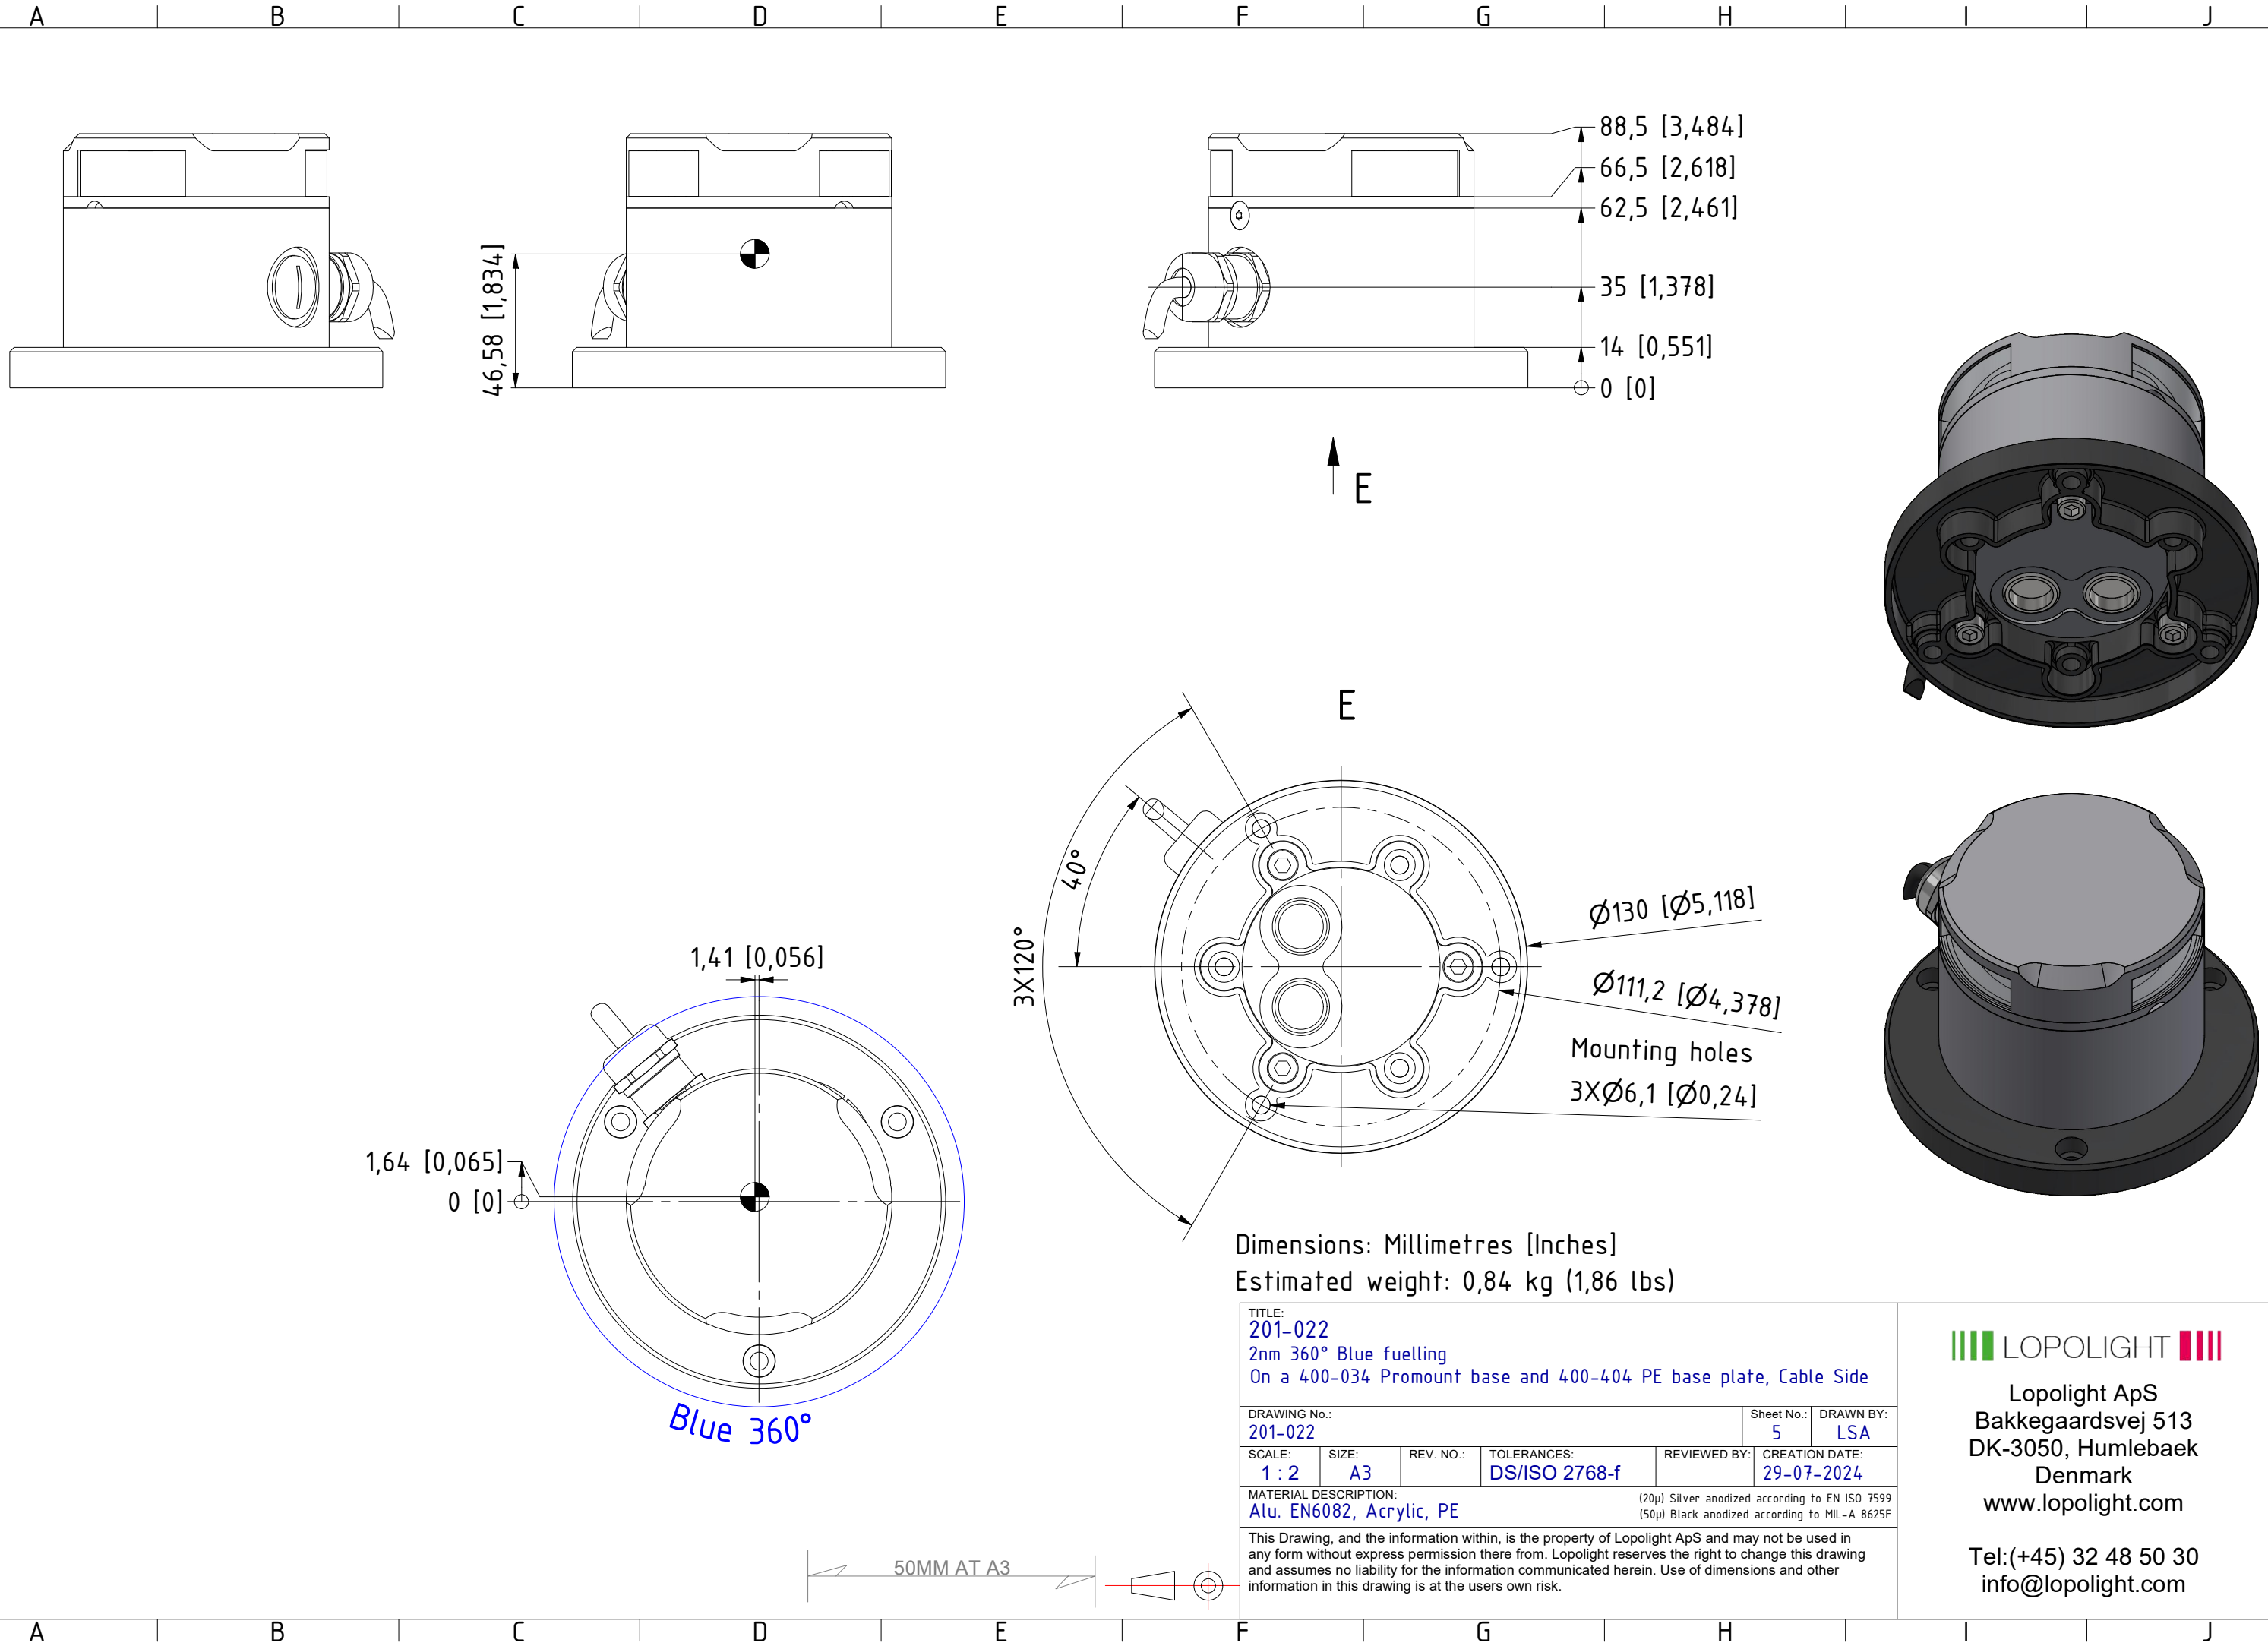


TITLE: 201-022 2nm 360° Blue fuelling On a 400-034 Promount base and 400-404 PE base plate, Cable Side					
DRAWING No.: 201-022				Sheet No.: 5	DRAWN BY: LSA
SCALE: 1 : 2	SIZE: A3	REV. NO.:	TOLERANCES: DS/ISO 2768-f	REVIEWED BY:	CREATION DATE: 29-07-2024
MATERIAL DESCRIPTION: Alu. EN6082, Acrylic, PE					
(20µ) Silver anodized according to EN ISO 7599 (50µ) Black anodized according to MIL-A 8625F					
This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk.					

LOPOLIGHT

Lopolight ApS
Bakkegaardsvej 513
DK-3050, Humlebaek
Denmark
www.lopolight.com

Tel:(+45) 32 48 50 30
info@lopolight.com

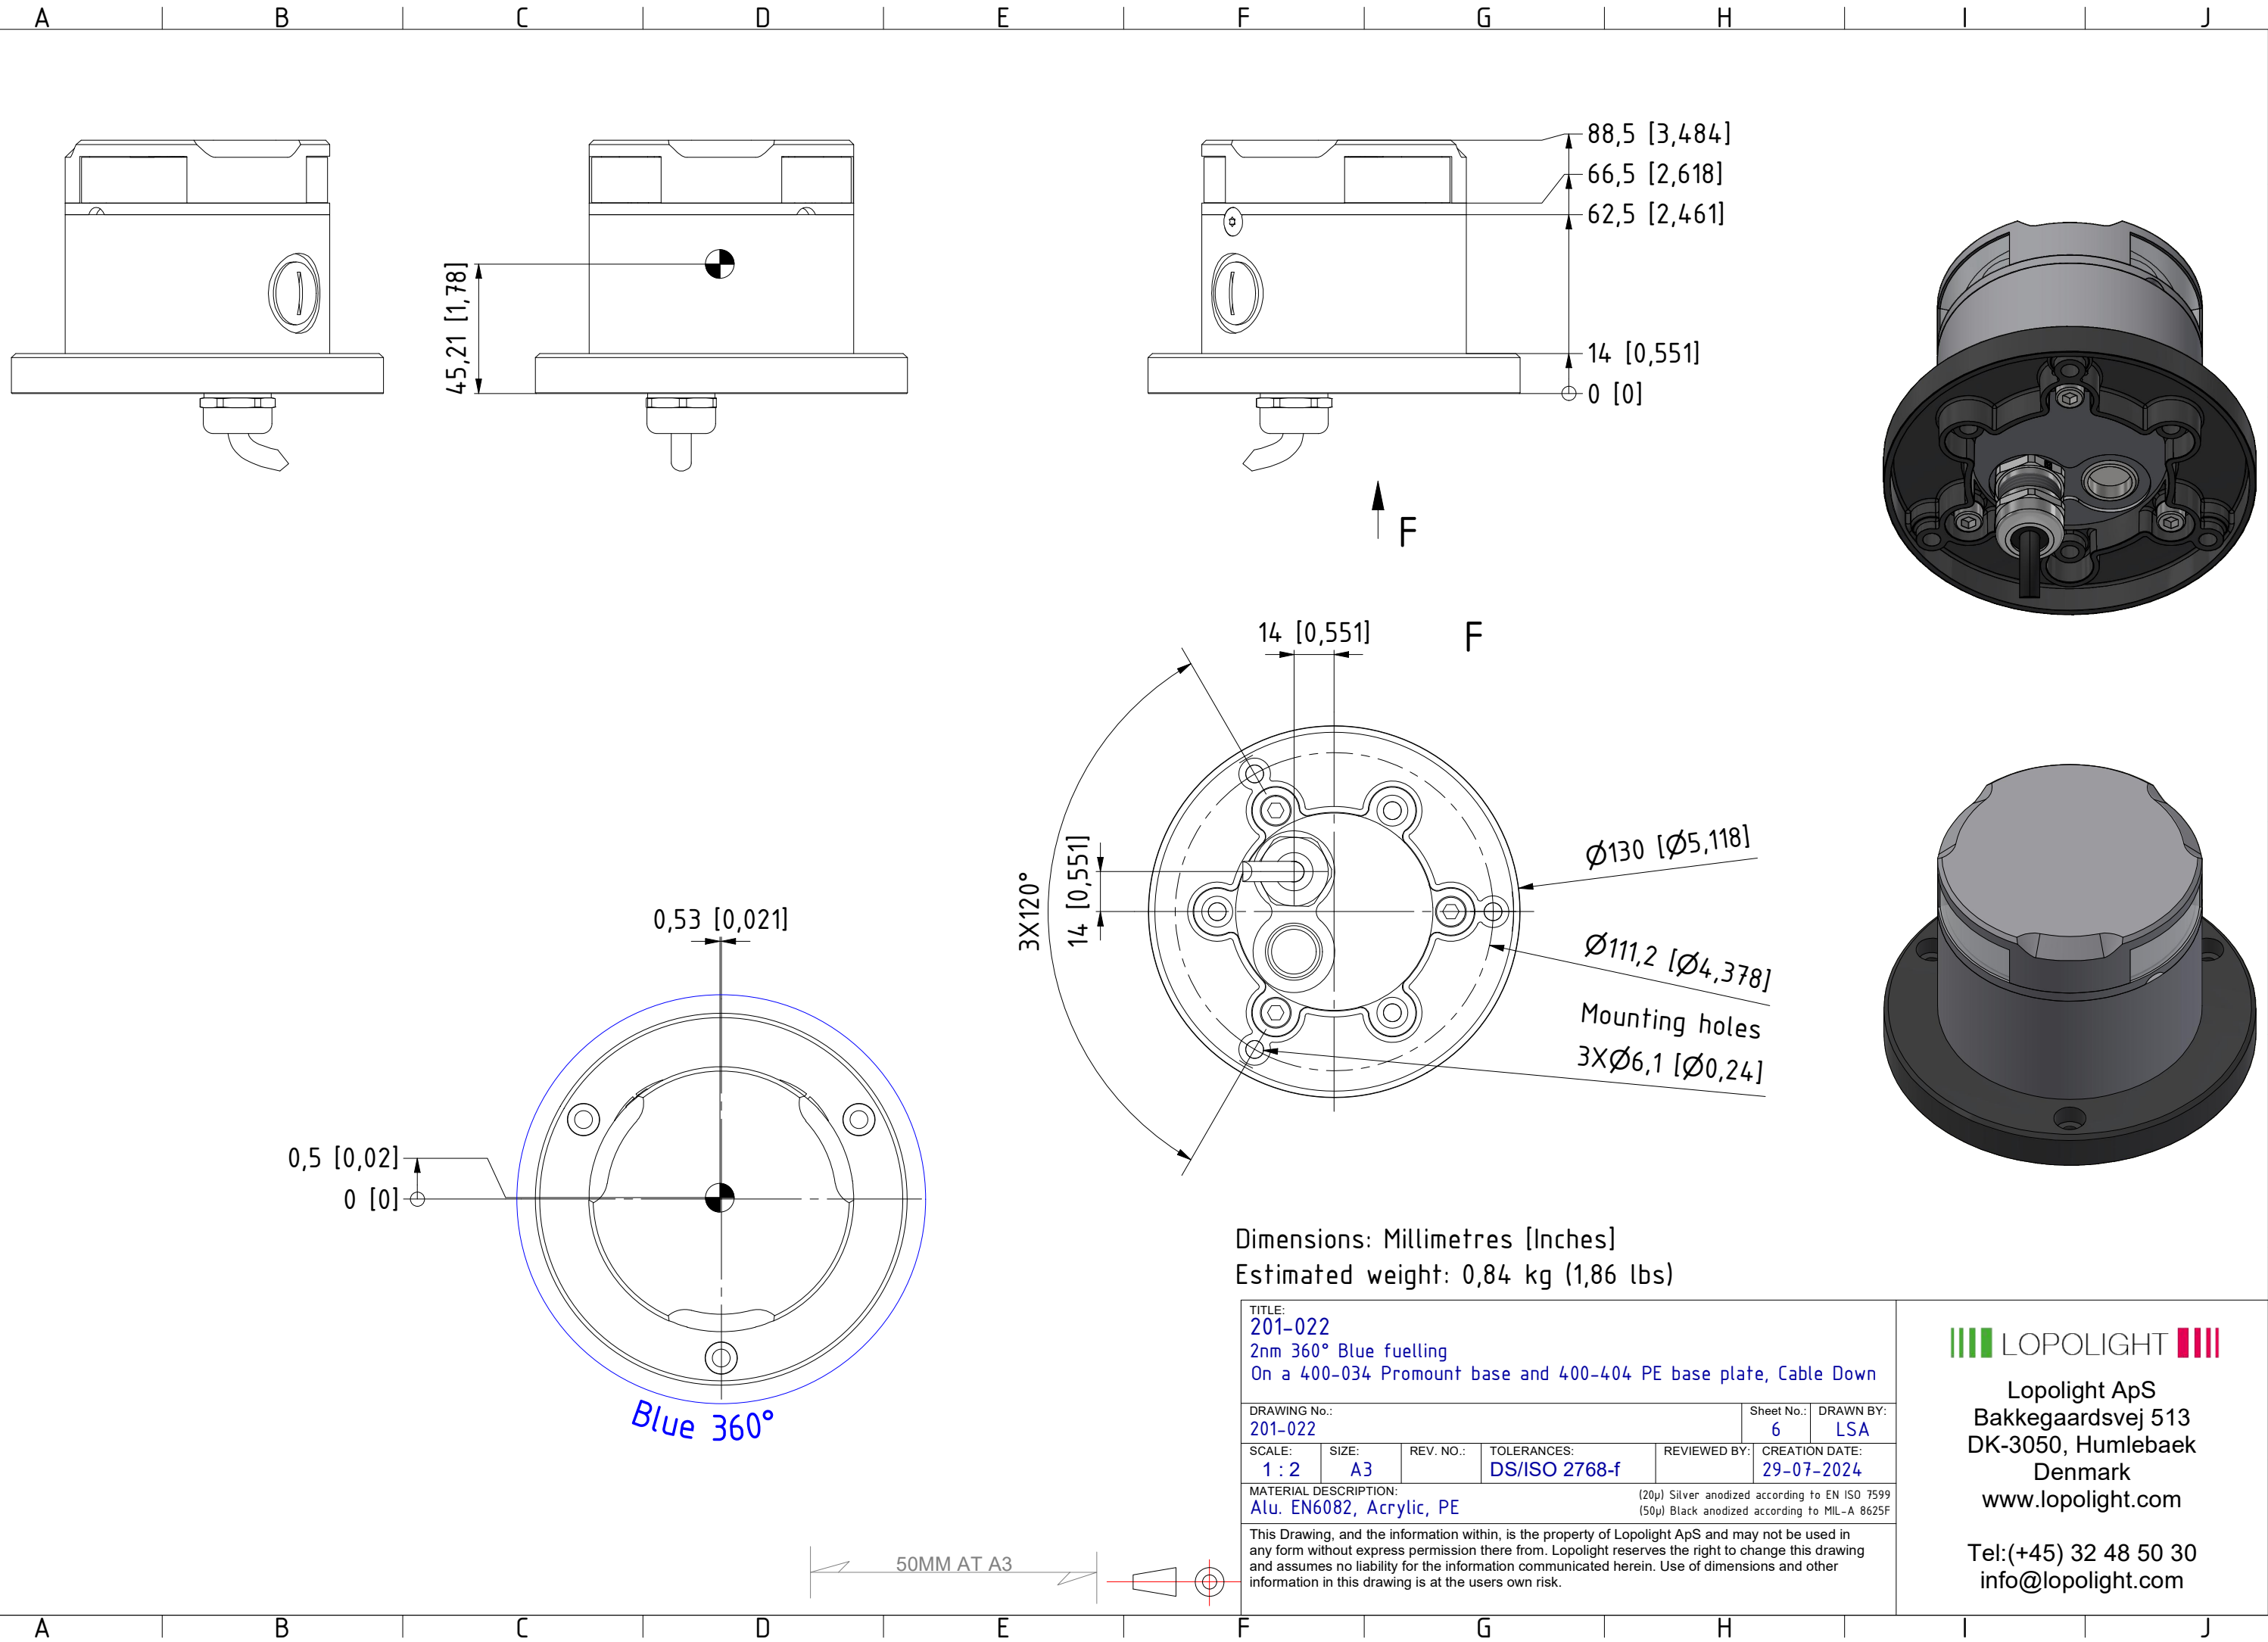








Dimensions: Millimetres [Inches]
Estimated weight: 0,84 kg (1,86 lbs)

TITLE: 201-022 2nm 360° Blue fuelling On a 400-034 Promount base and 400-404 PE base plate, Cable Down					
DRAWING No.: 201-022				Sheet No.: 6	DRAWN BY: LSA
SCALE: 1 : 2	SIZE: A3	REV. NO.:	TOLERANCES: DS/ISO 2768-f	REVIEWED BY:	CREATION DATE: 29-07-2024
MATERIAL DESCRIPTION: Alu. EN6082, Acrylic, PE					
(20µ) Silver anodized according to EN ISO 7599 (50µ) Black anodized according to MIL-A 8625F					
This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk.					

LOPOLIGHT

Lopolight ApS
Bakkegaardsvej 513
DK-3050, Humlebaek
Denmark
www.lopolight.com

Tel:(+45) 32 48 50 30
info@lopolight.com

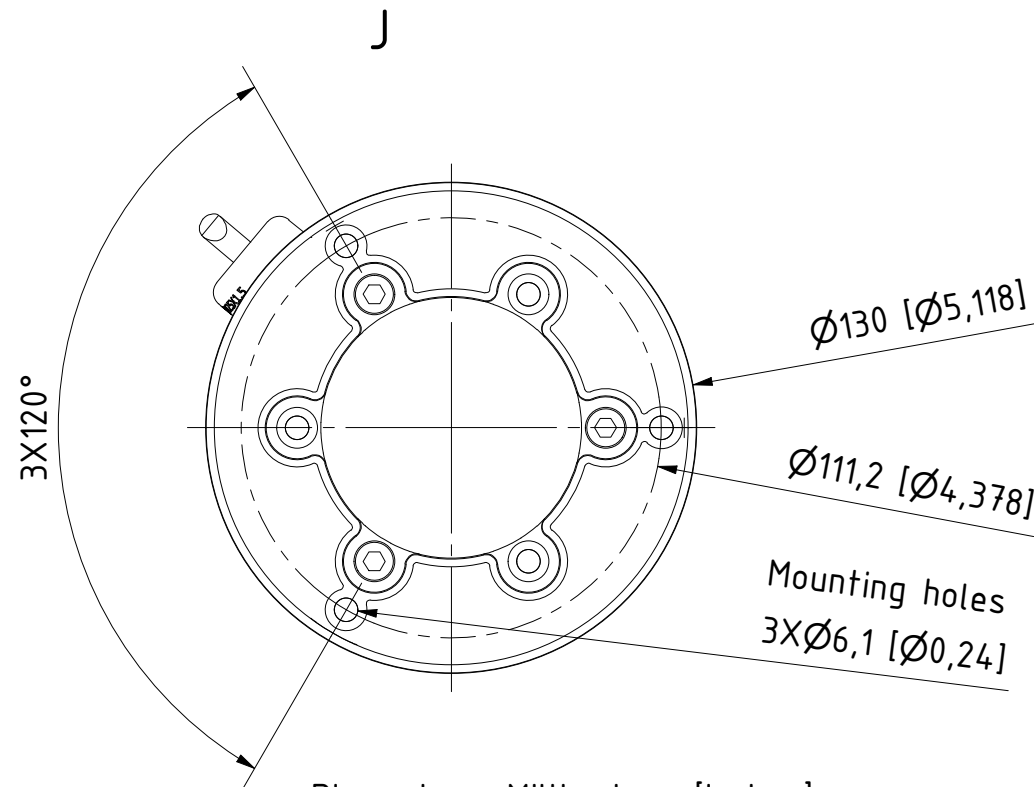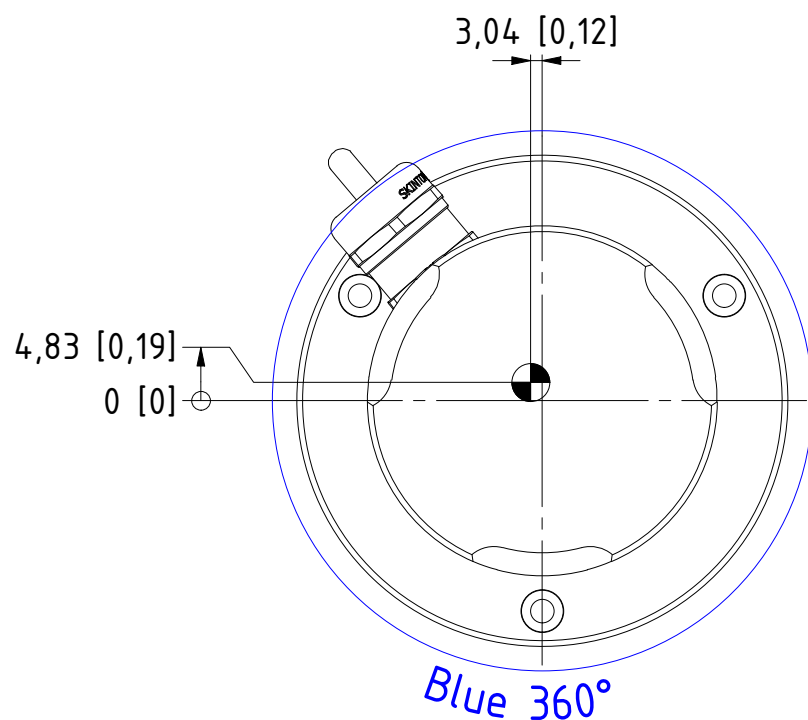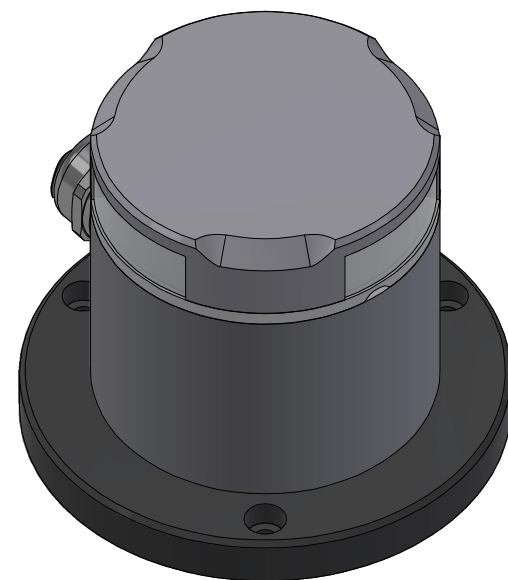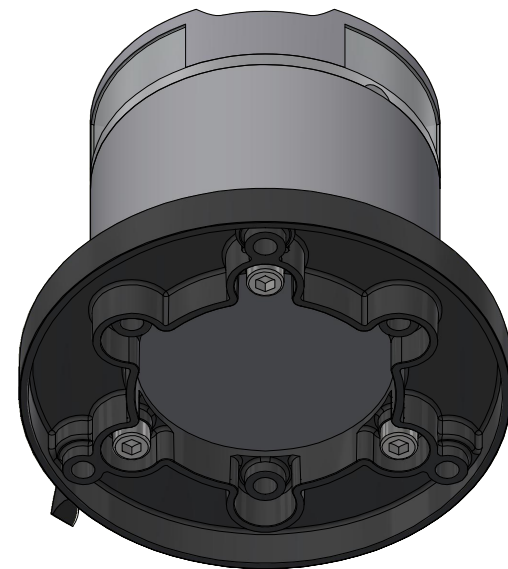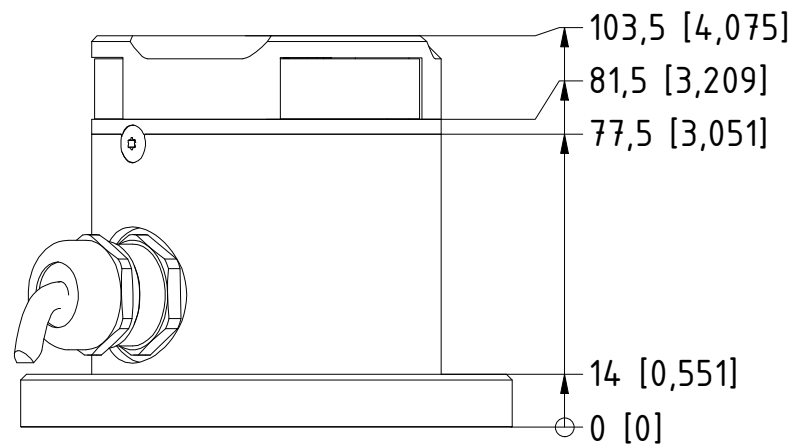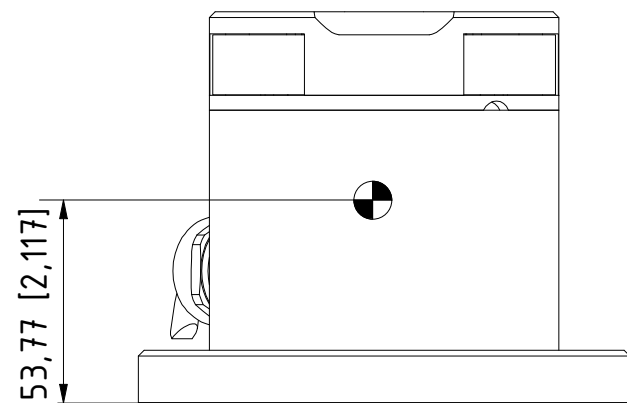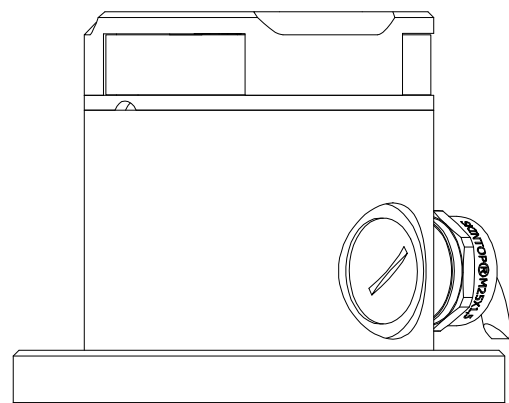

Dimensions: Millimetres [Inches]
Estimated weight: 1,02 kg (2,25 lbs)

TITLE:
201-022
2nm 360° Blue fuelling
On a 400-037 Promount base and 400-404 PE base plate , Cable Side

DRAWING No.:
201-022

Sheet No.:
7

DRAWN BY:
LSA

SCALE:
1 : 2

SIZE:
A3

REV. NO.:

TOLERANCES:
DS/ISO 2768-f

REVIEWED BY:

CREATION DATE:
29-07-2024

MATERIAL DESCRIPTION:
Alu. EN6082, Acrylic, PE

(20µ) Silver anodized according to EN ISO 7599
(50µ) Black anodized according to MIL-A 8625F

This Drawing, and the information within, is the property of Lopolight ApS and may not be used in any form without express permission there from. Lopolight reserves the right to change this drawing and assumes no liability for the information communicated herein. Use of dimensions and other information in this drawing is at the users own risk.



Lopolight ApS
Bakkegaardsvej 513
DK-3050, Humlebaek
Denmark
www.lopolight.com

Tel:(+45) 32 48 50 30
info@lopolight.com

