




NEON FLEX 0606

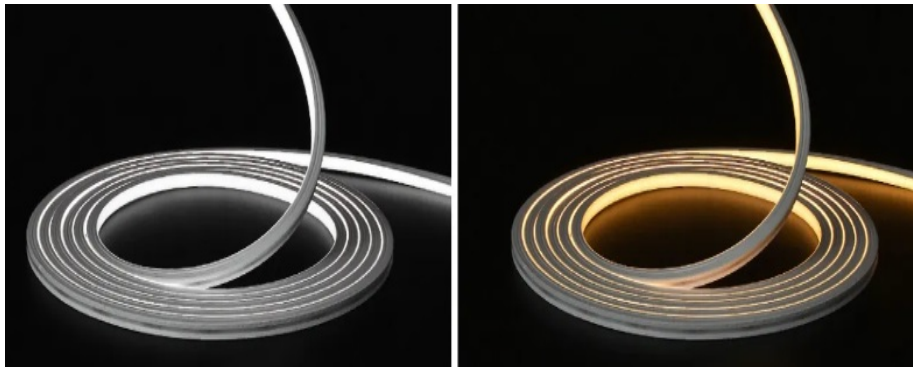

Features:

【Silicone Extruded】 This product is integrally extruded from food grade pure silicone. UV resistant, anti-aging, IP67 waterproof, durable for long-term outdoor use. Safer silicone material will not be self-ignited even burned with fire.

【25mm Cut】 It can be cut every 25mm (0.98 inch) with clear cut marks on its side position.

【Dimming】 The neon flex can be dimmed by Triac, 1-10V, DALI and DMX system. Please use appropriate 24VDC constant voltage drivers and controllers for dimming.

【Bending Direction】 When its luminous surface is facing up or down, the bending direction vertical.



【Power Supply】 Max 10mt/33ft powered from one end




Colors Available

Warm White: 2700K, 3000K	
Neutral White: 4000K, 5000K	
Cold White: 6000K, 6500K	Special Order
● ● ● Single color	Special Order


Technical Specifications	
LED Number/Meter	240pcs SMD2216
Power/Meter	6W/Mt (1.83W/Ft)
Lumen Flux@ 3000K	300~350Lm
Ra/Cri	Ra≥90 Cri>85
SDCM	<3
Input Voltage	24V DC
Cut Length	25mm, 0.98inch
Dimension	6x6mm
Available Length	10mt/33ft, 5mt/16ft. 1mt/3ft
Top Shape	Flat
View Angle	180 Deg
Bending Radius	50mm
Weights/Meter	60g
Lifespan	50,000hrs
IP Rate	IP67
Storage Temp.	-40°C ~ +70°C
Operating Temp.	-25°C ~ +50°C

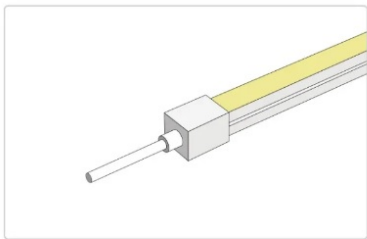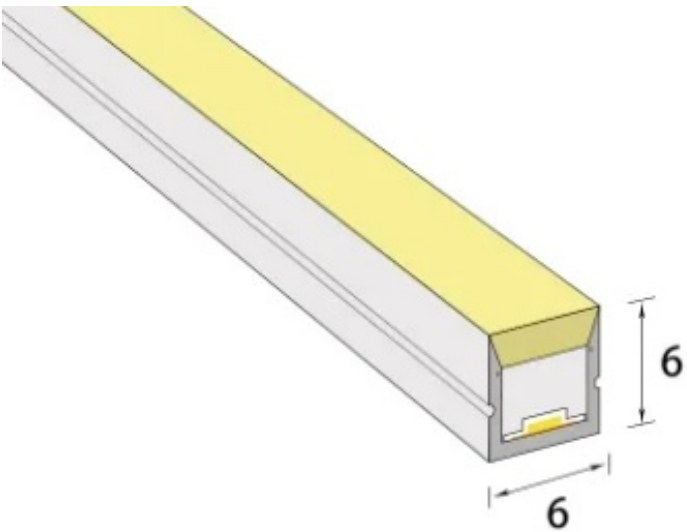

Front Entry

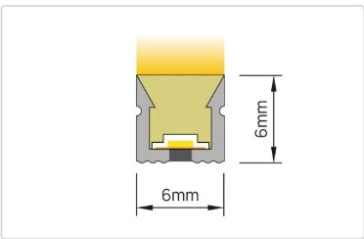

Top View

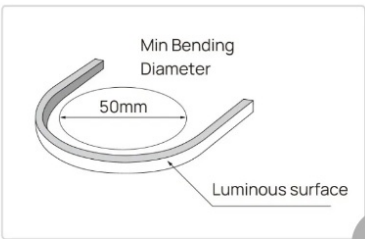

Horizontal Bending

Accessories:

- *End cap SKU; CAPS-END-6X6
- *Side lead-out SKU; CAPS-WIRE-6X6
- *Aluminum clip 3cm SKU; NF0606-CL
- *Aluminum track 1m long SKU; NF0606-AT

- NF0606-10M24V27K
- NF0606-10M24V30K
- NF0606-10M24V40K
- NF0606-10M24V50K
- NF0606-05M24V27K
- NF0606-05M24V30K
- NF0606-05M24V40K
- NF0606-05M24V50K
- NF0606-01M24V27K
- NF0606-01M24V30K
- NF0606-01M24V40K
- NF0606-01M24V50K

2 Years warranty

www.compassmarinesupplyllc.com
email: compassmarinesupplyllc@gmail.com